


SAFETY TRIPODS AND WINCHES

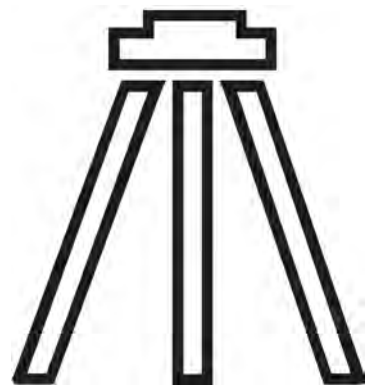

2022/23



TABLE OF CONTENTS

4	UTB handle
6	Summary of winches
10	Example uses of Tripod sets

12	TM 1
14	TM 6
16	TM 9-N
18	TM 14-ZSE
20	TM 14-SB
22	TM 12 SPIDER
24	TM 12-2 HEXAPOD
26	TM 15

46	RUP 502-U
30	RUP 502-B
32	RUP 503-U
34	RUP 503-B
36	RUP 505-U
38	RUP 506
39	RUP 504
40	CRW 200
42	CRW 300
44	RUP 502-BT
46	RUP 503-BT
48	PULLEYS



UTB

Universal handle fot all Tripods



Tripod leg mounting



Tripod
TM 15



Tripods
TM 1, TM 9-N



Tripods
TM 6, TM 12, TM 12-2, TM-14-ZSE



PARAMETERS:

Mass:	2250 g
Material:	galvanised steel, rubber, plastic



DEVICE DESCRIPTION:

The universal holder (UTB) can be attached to all tripods offered. The following winches are compatible with the holder (UTB): RUP502 / RUP503 / RUP504 / RUP506.



SUMMARY OF WINCHES

The universal holder is compatible with all types of tripods, regardless of the profile used

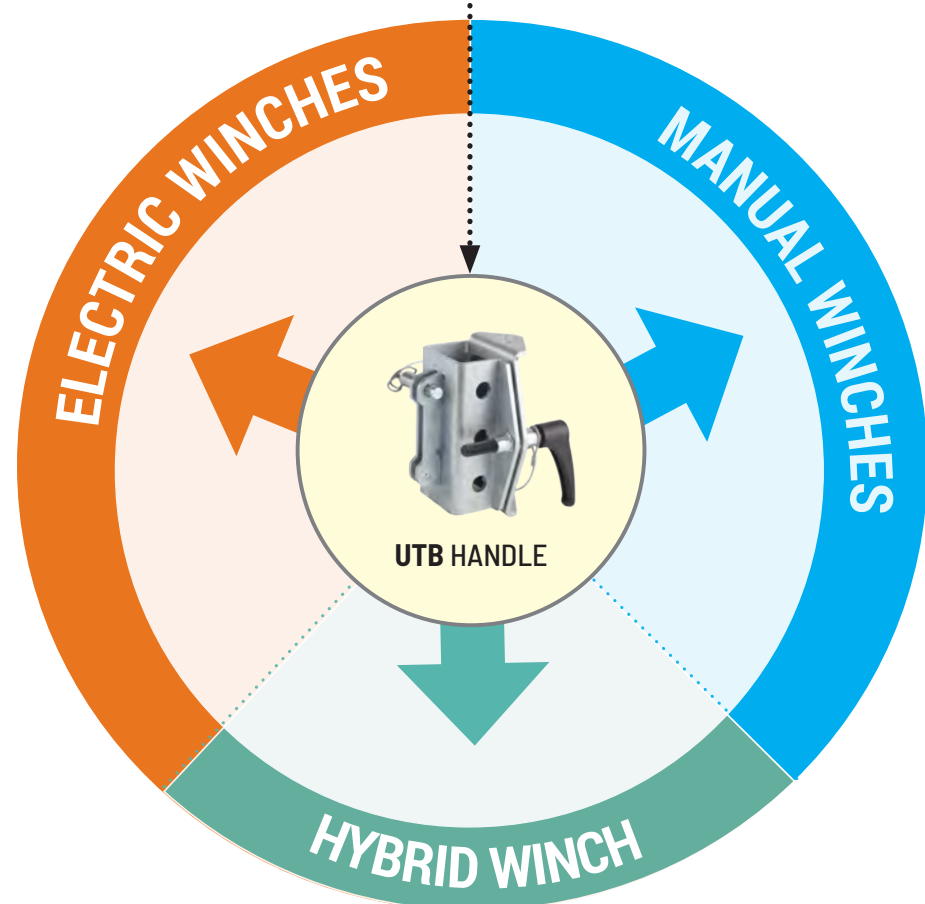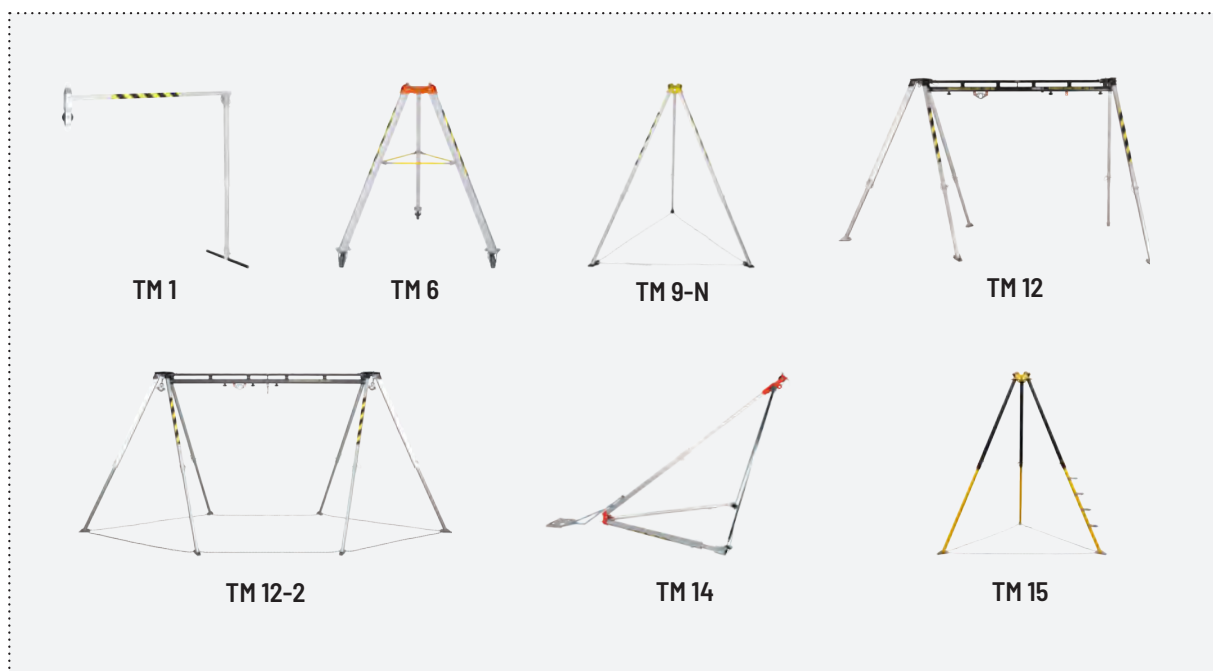

MANUAL WINCHES



RUP 502-U



RUP 503-U

ELECTRIC WINCHES



RUP 504



RUP 506

HYBRID WINCH





RUP 505-U




SUMMARY OF WINCHES

Devices mounted
on the base of the tripod by means of UTB
and the appropriate HOLDER

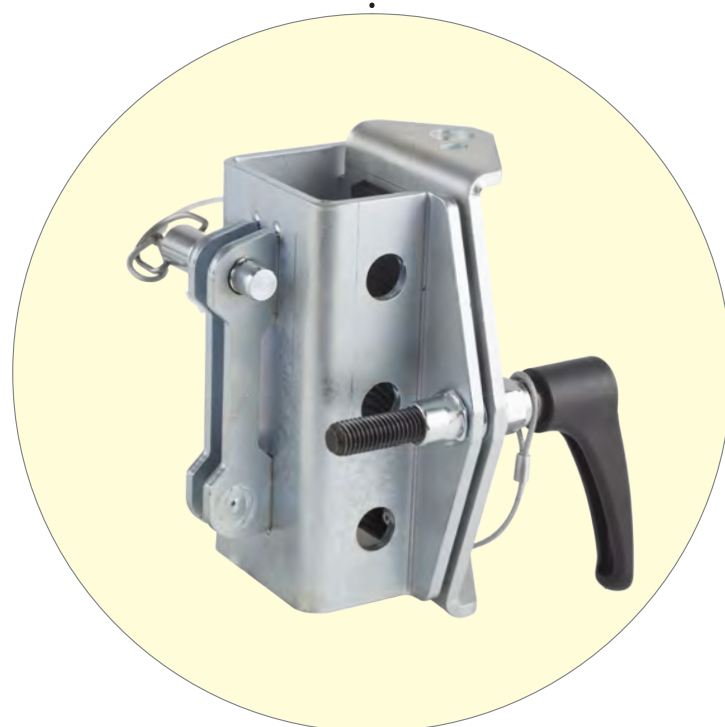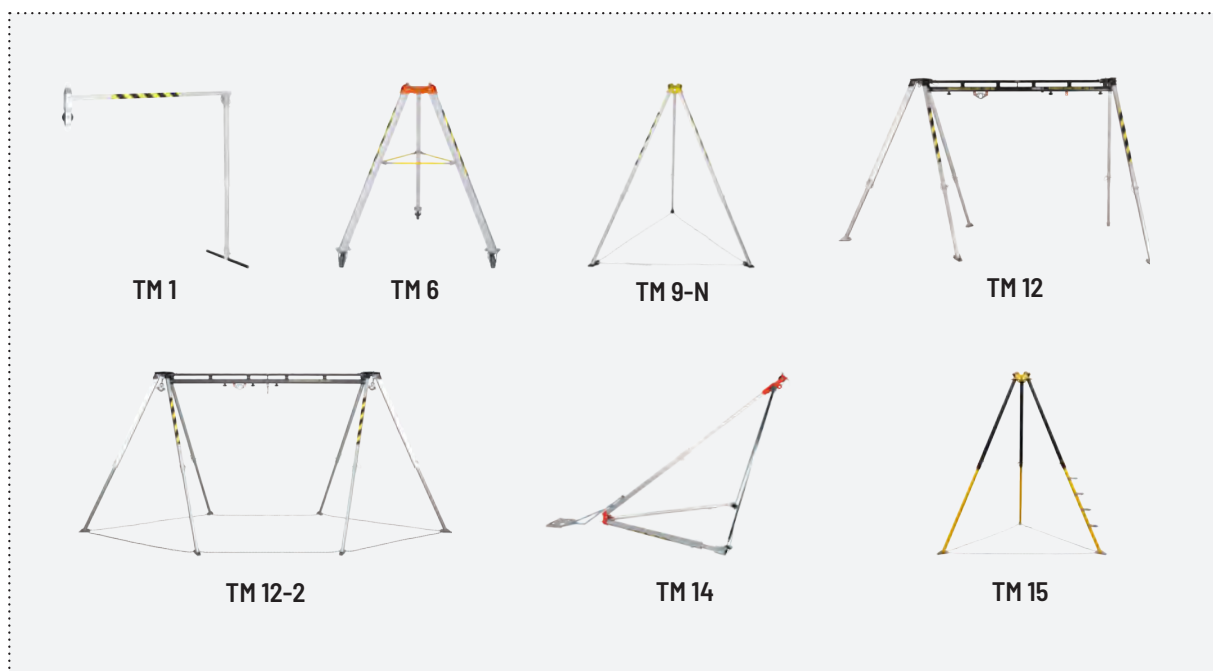


UTB HANDLE

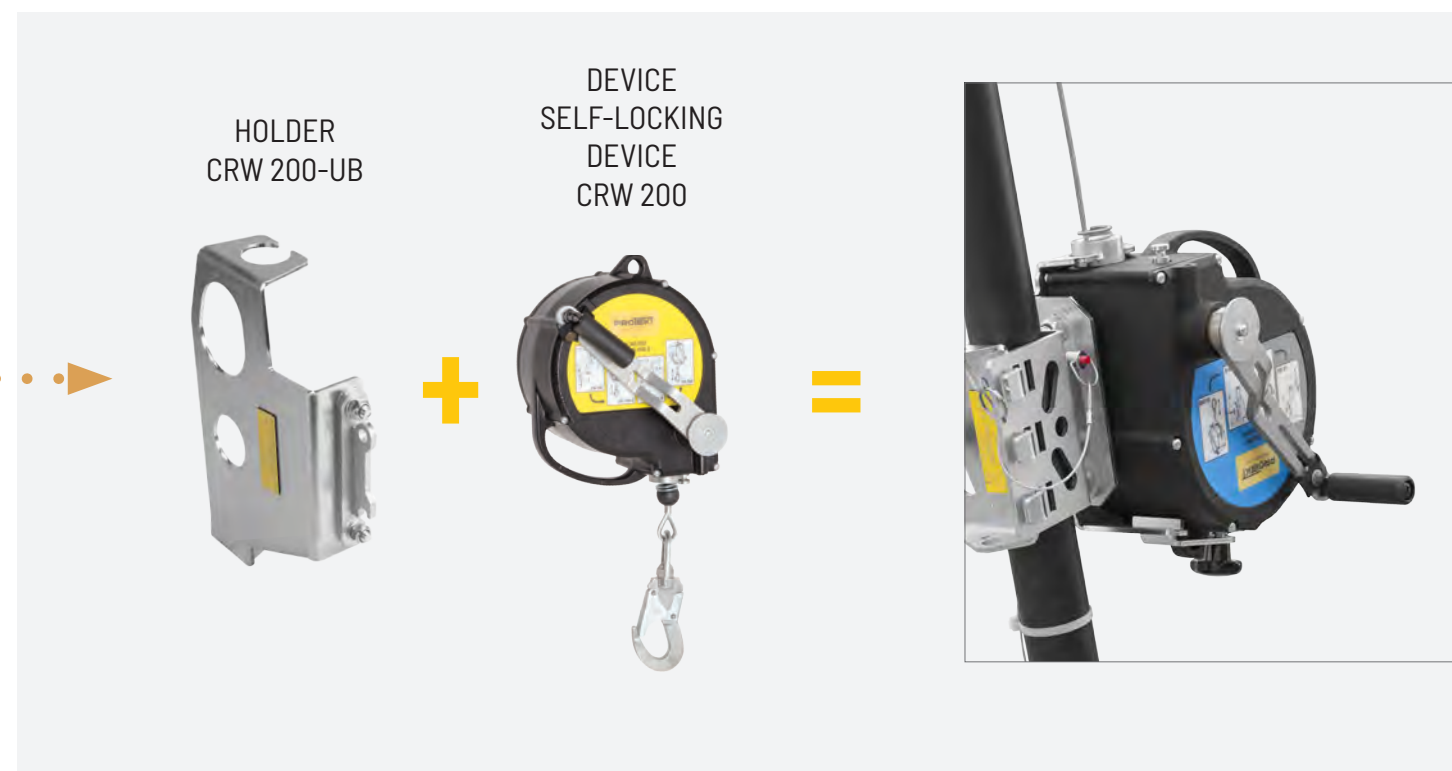




EXAMPLE USES OF TRIPOD SETS

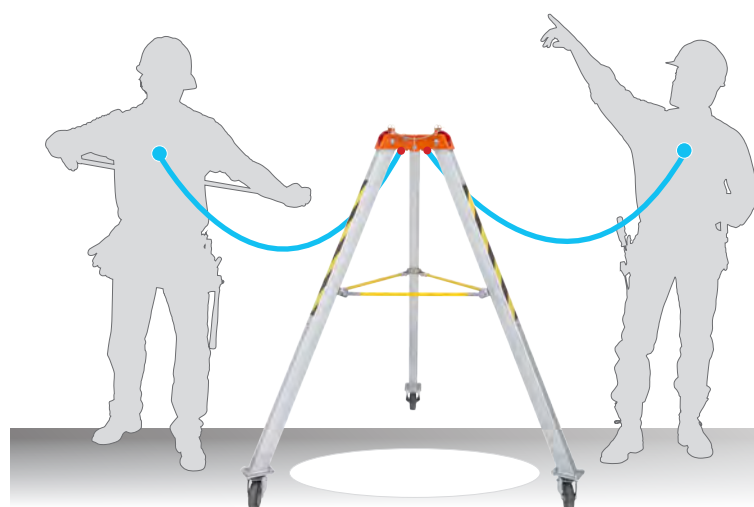

USE OF THE TRIPOD WITHOUT LIFTING DEVICES AS A MOBILE ANCHOR POINT.



USE OF THE TRIPOD WITH LIFTING DEVICE AND RETRACTABLE TYPE FALL ARRESTER TO LIFT/LOWER A WORKER.

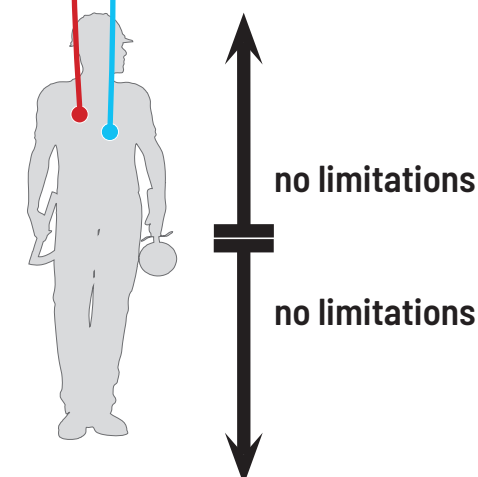


USE OF TRIPOD AND RETRACTABLE TYPE FALL ARRESTER WITH RESCUE LIFTING DEVICE FUNCTION TO SAFEGUARD A WORKER (WITH POSSIBILITY OF INSTANT EVACUATION).




no limitations

max. 2 m

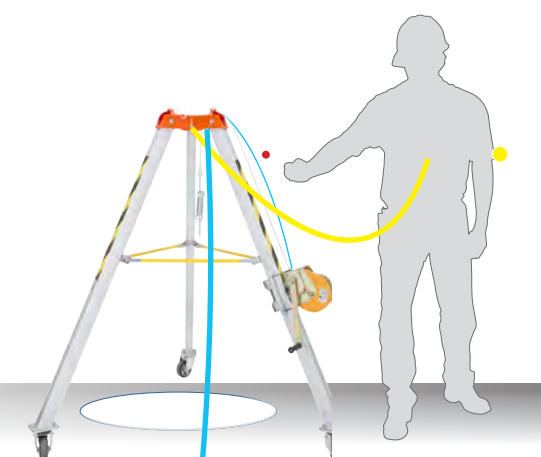

USE OF TRIPOD WITH LIFTING DEVICE TO LIFT/LOWER A WORKER.

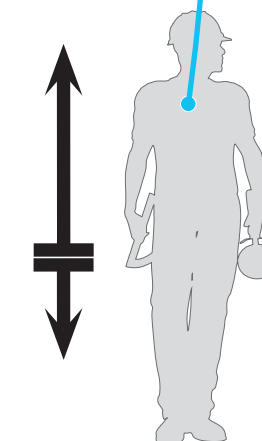



TM 1



Pulley has 2 anchor points. Upper anchor point on pulley is used for connecting crane TM 1 to a permanent structure. Lower anchor point on arm is used for installation of rescue lifting devices.



Leg is made of hot-dip galvanized steel, has 4-step adjustment, and is locked with a cotter.



Connector enables adjustment of the arm angle and locking in one of 5 positions (from 80° up to 130°) by means of a cotter.




Lower end of leg has a removable foot with rubber pads providing anti-slip protection.

Height:	71 - 280 cm
Opening diameter under tripod:	-
Leg spacing:	-
Device weight:	8 kg
Anchor points on head:	2
Lifting and lowering:	1 person only
Transport dimensions:	190 x 22 x 22 cm


PERSONAL TRIPODS



HEAD – PLAN VIEW

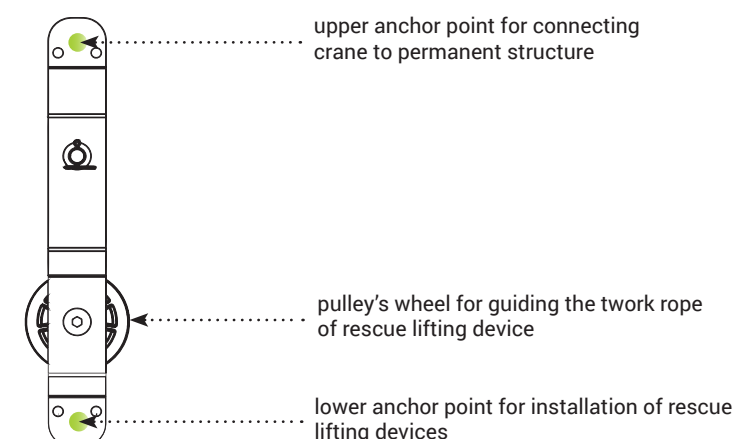

DIMENSIONS

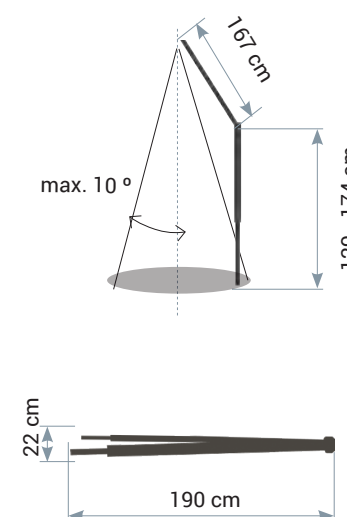

NORM:

EN 795/B:2012
TS 16415/B:2013



DESCRIPTION
OF DEVICE:

Safety tripod TM 6 is a mobile anchoring device intended for protection of up 2 persons at the same time. Guide wheels are integrated with the tripod head enabling operation with rescue lifting devices without the need to use any additional pulley.


LIFTING
AND LOWERING:



Max.
2 persons

COMPATIBLE
WITH:

RUP 502-U
CRW 200
CRW 300




The head is made of powder coated galvanized steel. Equipped with 2 wheels for guiding the work rope on rescue lifting devices. Cotter pins above the wheels protect the rope against accidental slipping during work.



Automatic leg opening locks protect the tripod against accidental collapse during use.



Support bars are made of powder coated galvanized steel. They help stabilize the tripod during work. Each bar is secured with ratchets to prevent it from detaching during work.



The tripod legs are made of strengthened aluminium profiles. Two legs „A“ are equipped with a wheel (for guiding the work rope) and anchor point (bore) for mounting winches; the third leg „B“ has no wheel or anchor point.



Two legs „A“ are equipped with swivel wheels with brake to provide easier tripod mobility. Wheels are made of aluminium alloy and rubber (wheel) and galvanized steel (housing).

Height:	160 cm
Opening diameter under tripod:	157 cm
Leg spacing:	116 cm
Device weight:	34 kg
Anchor points on head:	3
Lifting and lowering:	maximum 2 persons
Transport dimensions:	200 x 47 x 47 cm



HEAD – PLAN VIEW

DIMENSIONS:

NORM:

LIFTING
AND LOWERING:

COMPATIBLE
WITH :

EN 795/B:2012
TS 16415/B:2013



 Max.
2 persons

RUP 502-U
RUP 503-U
RUP 504
RUP 505-U
RUP 506
CRW 200
CRW 300



DESCRIPTION
OF DEVICE:


Safety tripod TM 6 is a mobile anchoring device intended for protection of up 2 persons at the same time. Guide wheels are integrated with the tripod head enabling operation with rescue lifting devices without the need to use any additional pulley.

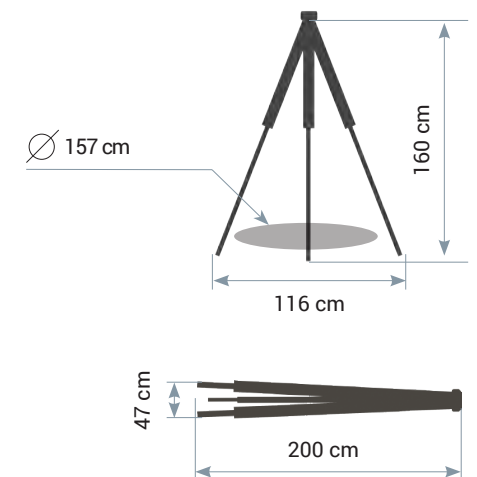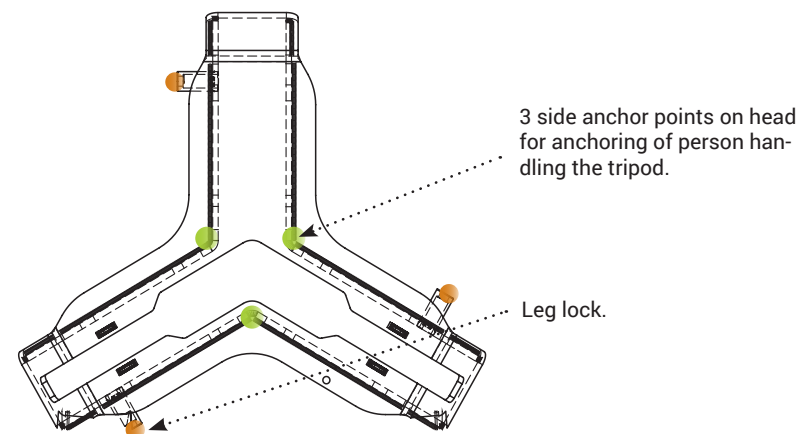



TM 9-N

3 lateral anchor points on the head for the belayer tripod operator

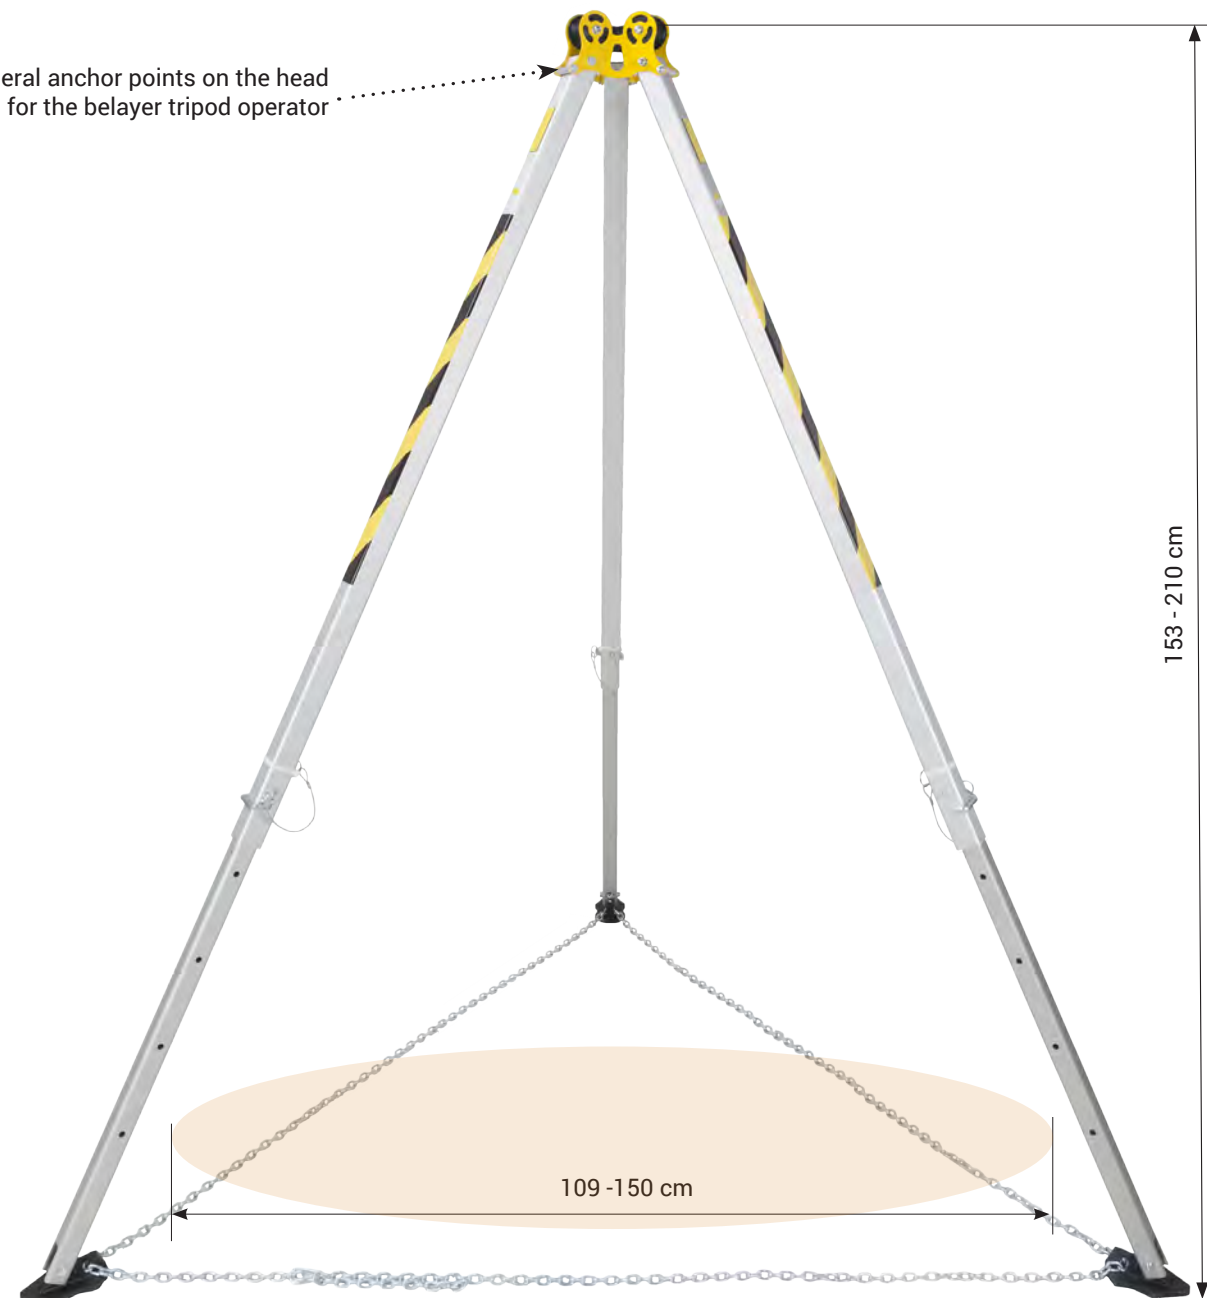

NORM:

EN 795/B:2012
NORM:



DESCRIPTION
OF DEVICE:

Safety tripod TM 9-N is a portable anchoring device intended for up to 3 users.

LIFTING
AND LOWERING:



Max.
3 persons

DESCRIPTION
OF DEVICE:

Compatible with the following devices using the new UTB support :

RUP 502-U
RUP 504
RUP 505-U
RUP 506
CRW 200
CRW 300

PERSONAL TRIPODS




The head is made of galvanised powder-coated steel. It has 3 bearing-mounted rollers to guide the working rope of rescue or hoisting devices



New composite feet

The following winches are compatible with the UTB carrier:



RUP 502-U



RUP 504



RUP 506



RUP 505-U

CRW 200-UB
adapter for CRW 200




CRW 200

CRW 300-UB
adapter for CRW 300



CRW 300

HEAD – PLAN VIEW

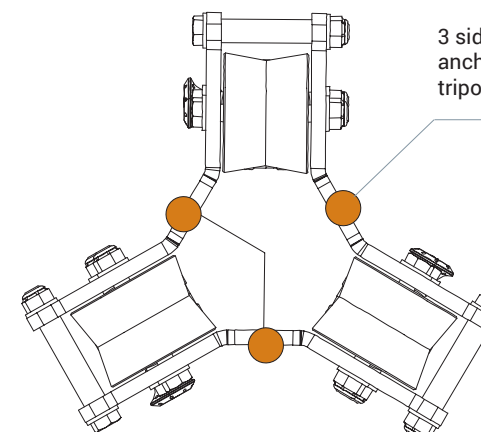

3 side anchor points on head for anchoring of person handling the tripod.







TM 14-ZSE



The pulley with 2 anchor points



The pulley is made of powder coated galvanized steel and has a wheel for guiding the winch rope when used as rescue frame. The pulley has an additional anchor point which can be used for e.g. mounting a retractable type fall arrester.



Supports with feet provide stability for arm with pulley at its end. They are made of aluminium and galvanized steel.



In order to improve the strength of the structure, the tripod legs with supports at their ends are secured with a steel chain.




The drive-on plate is made of galvanized and stainless steel and is used for installation of counterweight. Counterweight can be a set of steel plates or a vehicle weighing 3.5 t. The plate can be fixed to the ground by means of mechanical or chemical anchors.




Set of steel plates can be used as counterweight if the tripod cannot be anchored by a vehicle or fixed to the ground. Comprises 19 special plates made of powder coated steel of 25 kg each.

Height:	208 cm
Extension:	71 cm
Overall length:	362 cm
Leg spacing:	165 cm
Weight:	65 kg
Lifting and lowering:	max 200 kg

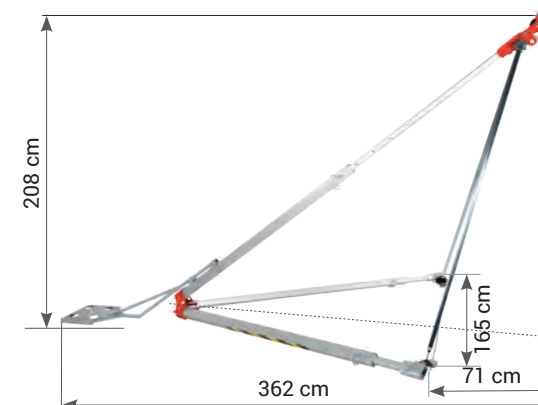


ANCHORING TO THE GROUND

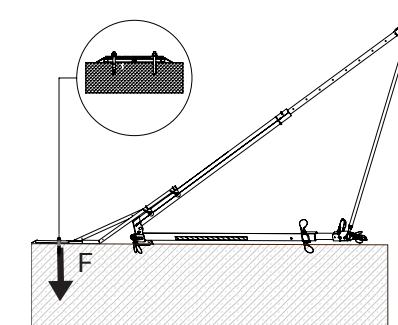


Drive-on plate can be fixed to a concrete or steel surface by means of at least 2 mechanical or chemical anchors with minimum tensile strength of 12 kN.

VEHICLE AS A COUNTERWEIGHT

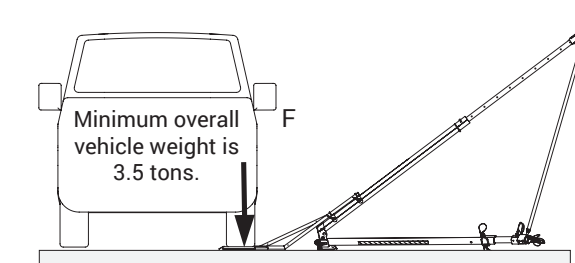

Drive-on plate can be loaded by placing a vehicle wheel on the axle at which the motor is installed. Minimum overall vehicle weight is 3.5 tons.

SET OF STEEL PLATES AS A COUNTERWEIGHT



Drive-on plate can be additionally loaded with special steel counterweight plates of 25 kg each.

STEEL PLATES SET AT015-600.

- Counterweight plates - 16 pcs
- Set of mounting screws - 1 pc
- Counterweight bracket rods - 2 pcs
- Rods plate - 1 pc

NORM:

LIFTING AND LOWERING:

COMPATIBLE WITH:

EN 795/B:2012
TS 16415/B:2013



DESCRIPTION OF DEVICE:




Max. 2 persons

RUP 502-U
RUP 503-U
RUP 504
RUP 505-U
RUP 506
CRW 200
CRW 300

TM 14 is a dual-purpose system: standard safety tripod and rescue frame.



TM 14-SB

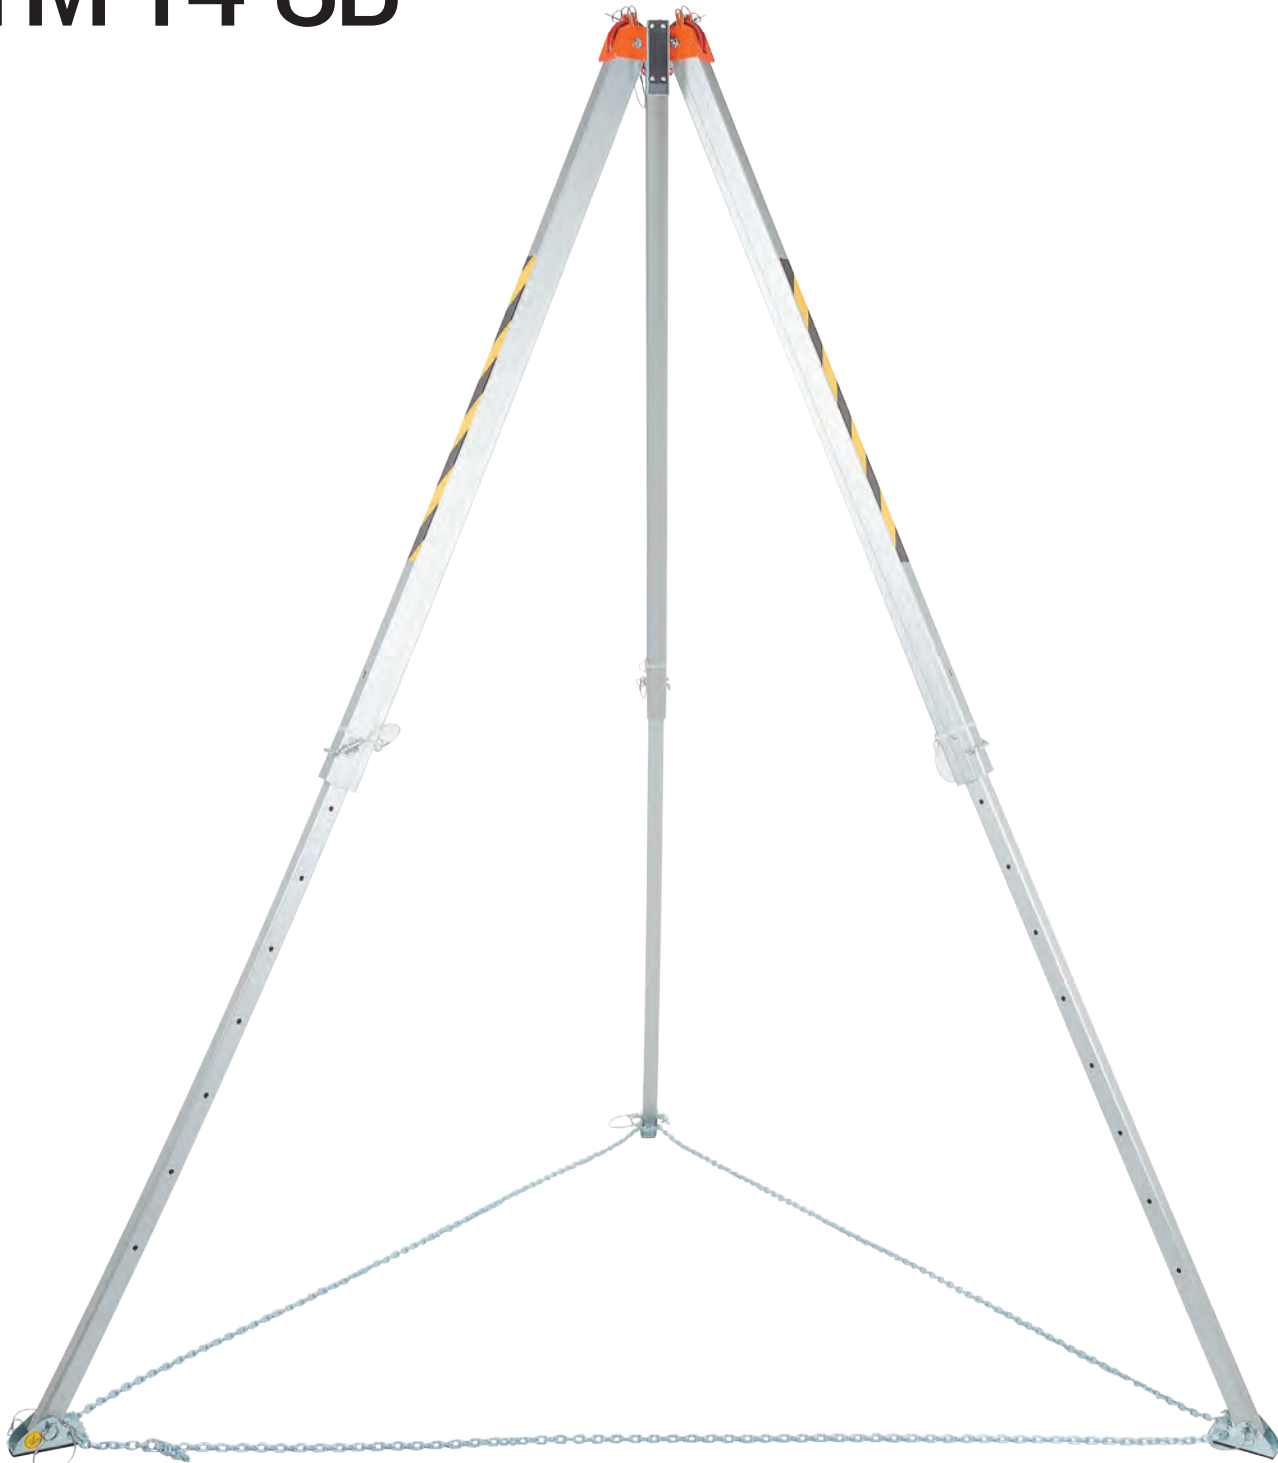

The head is made of powder coated galvanized steel. Two wheels for guiding the work rope rescue devices. Cotters above the wheels prevent the rope from accidental slipping during work.



The tripod legs are made of strengthened aluminium profiles with 9-step adjustment, locked with cotters. Two legs "A" are equipped with a wheel (for guiding the work rope) and anchor point (bore) for mounting winches; the third leg "B" has no wheel or anchor point.



Aluminium steps are mounted with cotters and provide easier access to the tripod head when extending the legs to their maximum height.




Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.



Tripod legs can be secured with textile webbing or steel chain.

Height:	179 - 289 cm
Opening diameter under tripod:	158 - 256 cm
Leg spacing:	147 - 232 cm
Device weight:	38 kg
Anchor points on head:	3
Lifting and lowering:	max. 2 persons
Transport dimensions:	228 x 32 x 30 cm

HEAD – PLAN VIEW

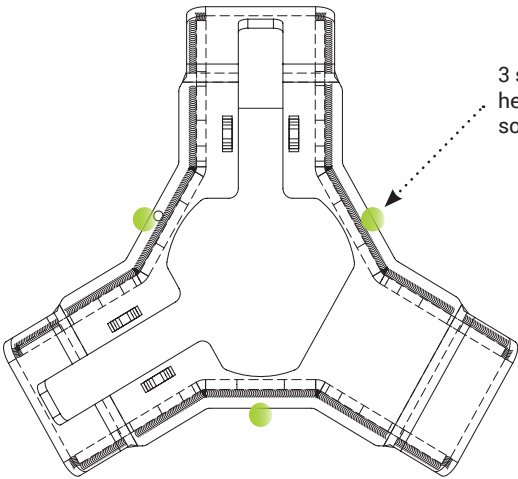

3 side anchor points on head for anchoring of person handling the tripod.

EXTENSION KIT FOR TM 14-ZSE



Additional option – kit AT015-150

The kit upgrades tripod TM 14-SB to version TM 14-ZSE

The kit comprises:

- Pulley - 1 pc
- Bracket - 2 pcs
- Head support - 1 pc
- Drive-on plate - 1 pc
- Left bracket base - 1 pc
- Right bracket base - 1 pc
- Chain - 1 pc

DIMENSIONS


Dimensions are the same as TM 13 tripod (previous page).

NORM:	LIFTING AND LOWERING:	COMPATIBLE WITH :
EN 795/B:2012 TS 16415/B:2013	Max. 2 persons	RUP 502-U RUP 503-U RUP 504 RUP 505-U RUP 506 CRW 200 CRW 300
CE Ex		
DESCRIPTION OF DEVICE:		


TM 14 is a dual-purpose system: standard safety tripod and rescue frame.




TM 12-SPIDER

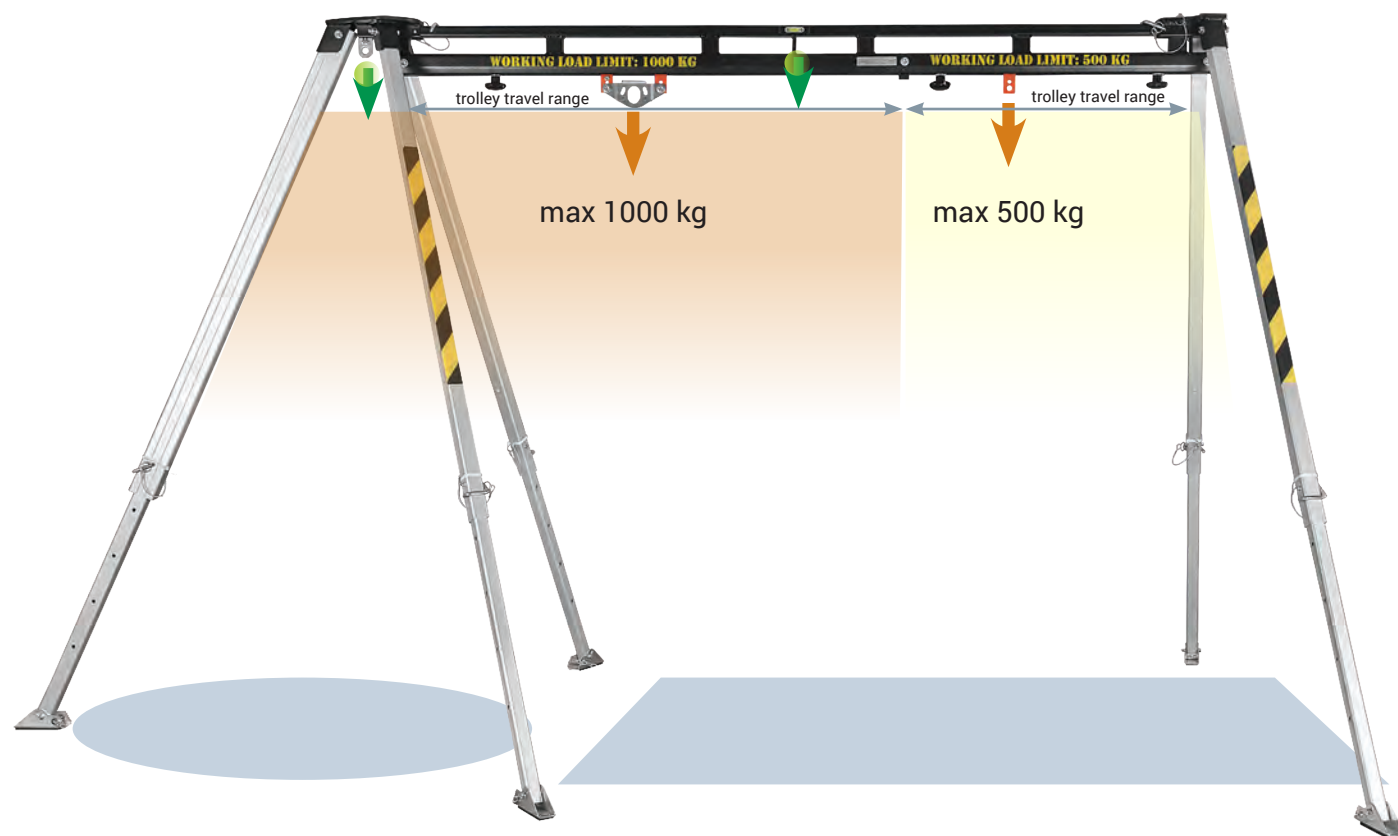

Height:	139 - 221 cm
Opening diameter under tripod:	150 - 223 cm
Tripod spacing:	139 - 191 cm
Spacing of the complete device:	325 - 368 cm
Beam weight:	30 kg
Beam length:	230 cm
Device weight:	76 kg
Maximum permissible load:	1000 kg
Lift / Lowering for:	max. 2 persons
Fixed anchor points:	4
Movable anchor points:	2
Transport dimensions:	254 x 33 x 33 cm



Steel trolley travelling along the beam is a movable anchor point which can be locked in a fixed position. The point withstands loads of up to 1000 kg or enables lifting/lowering of 1 person.



Steel trolley travelling along the beam is a movable anchor point which can be locked in a fixed position. The point withstands loads of up to 500 kg.



The tripod's beam is made of powder coated galvanized steel, and has 2 permanent anchor points for person handling the tripod. The beam is equipped with a level indicating whether the device is set properly.



The tripod's head is made of powder coated galvanized steel. It is equipped with an attachment point for a pulley and an additional anchor point for attaching of person handling the tripod.



The tripod's legs are made entirely of aluminium, and feature 7-step adjustment for flexible adaptation of the device's height to desired conditions.




Anti-slip tripod's foot can be adjusted to slippery surfaces.



The tripod's legs can be secured with a light textile webbing or a heavier steel chain.

PERSONNEL AND MATERIAL COMBO TRIPODS

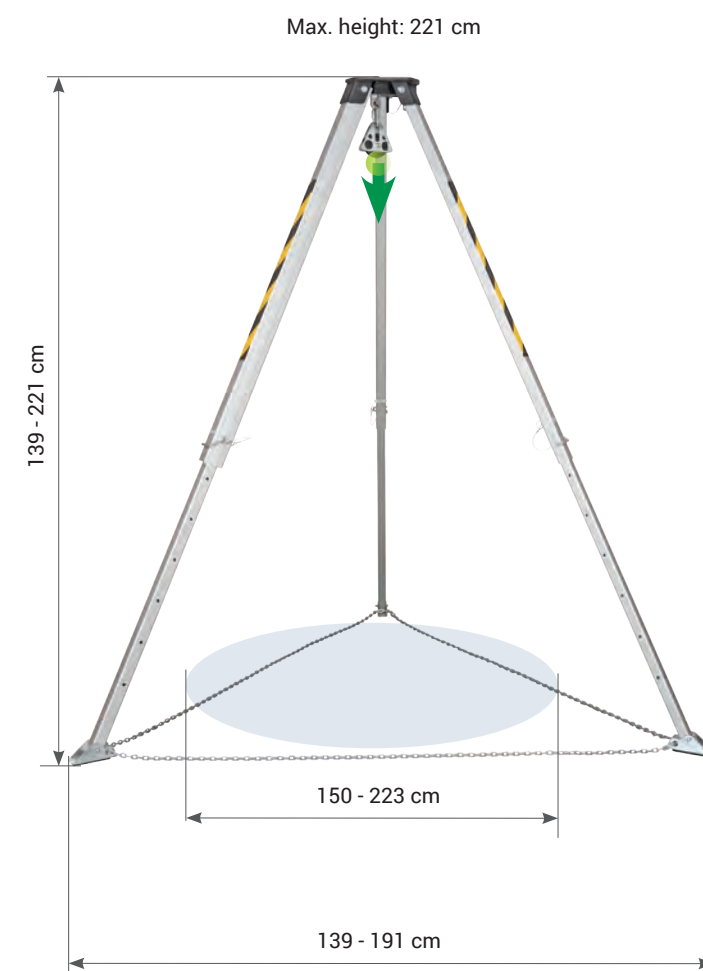

NORM:

LIFTING
AND LOWERING:

COMPATIBLE
WITH :

EN 795/B:2012
TS 16415/B:2013



DESCRIPTION
OF DEVICE:

Max. 2 persons or
capacity of up to 1000 kg



RUP 502-U
RUP 503-U
RUP 504
RUP 505-U
RUP 506
CRW 200
CRW 300


TM 12 SPIDER is a personnel and material device equipped with 2 movable and 4 fixed anchor points. With the system TM 12 Spider it is possible to use the left tripod as an independent work tripod for handling materials or lifting and lowering personnel.

EXTENDED VARIANT – WORK COMBO TRIPOD

Height:	139 - 221 cm
Opening diameter under tripod:	150 - 223 cm
Tripod spacing:	139 - 191 cm
Device weight:	72 kg
Lift / Descent for:	max. 1 person
Fixed anchor points:	2
Maximum permissible load:	1000 kg




EN 795/B:2012
TS 16415/B:2013





Max. 2 persons or
capacity of up to 1000 kg



TM 12-2 HEXAPOD

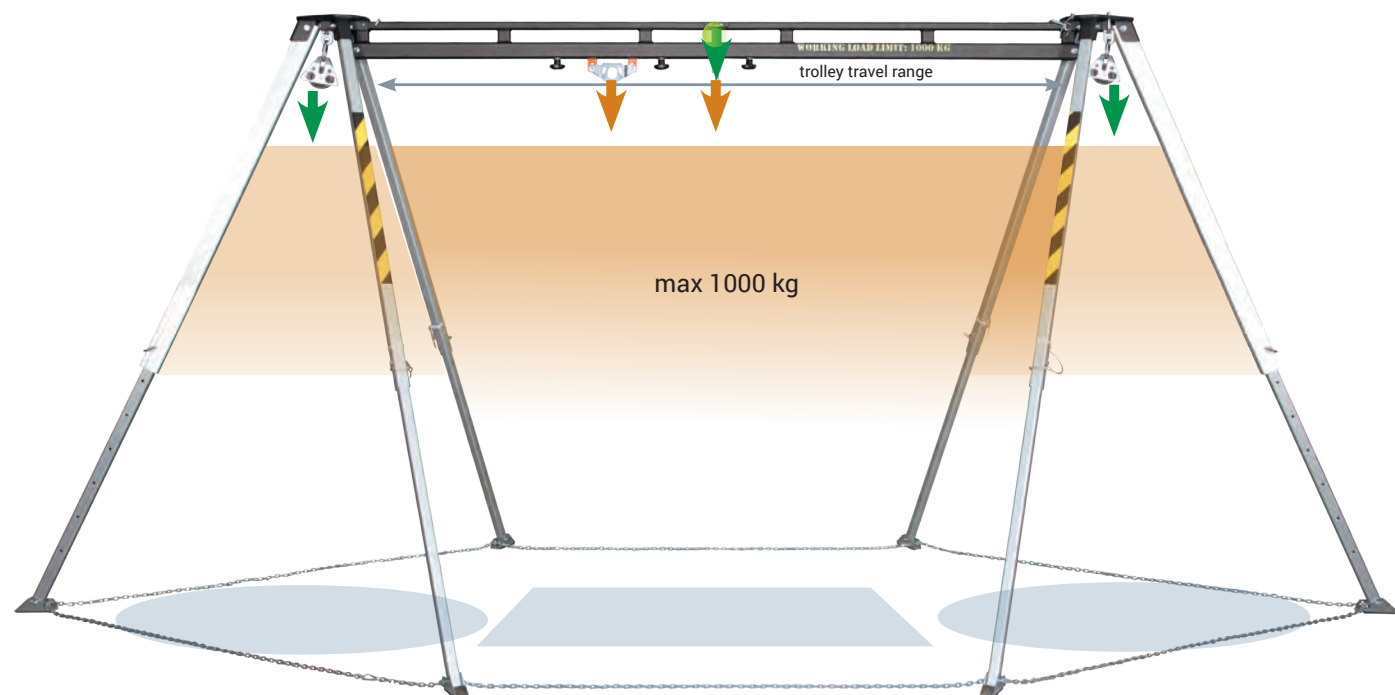

Height:	139 - 221 cm
Opening diameter under tripods:	150 - 223 cm
Tripod spacing:	139 - 191 cm
Spacing of complete device:	464 - 537 cm
Beam weight:	34 kg
Beam length:	280 cm
Device weight:	90 kg
Fixed anchor points:	6
Maximum permissible load:	1000 kg
Lift / Descent for:	max. 2 persons
Movable anchor points:	2
Transport dimensions:	254 x 33 x 33 cm



Steel trolley travelling along the beam is a movable anchor point which can be locked in a fixed position. The point withstands loads of up to 1000 kg or enables lifting/lowering of 1 person.



Steel trolley travelling along the beam is a movable anchor point which can be locked in a fixed position. The point withstands loads of up to 500 kg.



The tripod's beam is made of powder coated galvanized steel, and has 2 permanent anchor points for a person handling the tripod. The beam is equipped with a level indicating whether the device is set properly.



The tripod's head is made of powder coated galvanized steel. It is equipped with an attachment point for a pulley and an additional anchor point for attaching of person handling the tripod.




The tripod's legs are made entirely of aluminium, and feature 7-step adjustment for flexible adaptation of the device's height to desired conditions.



Anti-slip tripod's foot can be adjusted to slippery surfaces.



The tripod's legs can be secured with a light textile webbing or a heavier steel chain.

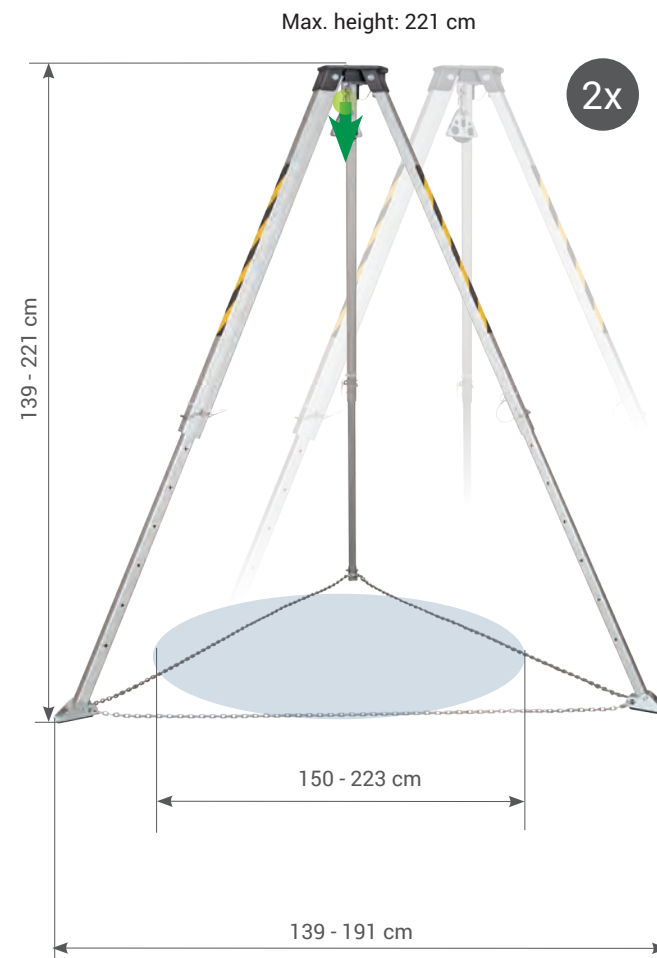

With the system TM 12-2 Hexapod it is possible to use side tripods as independent work tripods for handling materials or lifting and lowering personnel

NORM:

LIFTING
AND LOWERING:

COMPATIBLE
WITH :

EN 795/B:2012
TS 16415/B:2013



DESCRIPTION
OF DEVICE:

Max. 2 persons or
capacity of up to 1000 kg



RUP 502-U
RUP 503-U
RUP 504
RUP 505-U
RUP 506
CRW 200
CRW 300


TM 12-2 HEXAPOD is a personnel and material device equipped with 2 movable and 6 fixed anchor points.

EXTENDED VARIANT – WORK COMBO TRIPOD

Height:	139 - 221 cm
Opening diameter under tripod:	150 - 223 cm
Tripod spacing:	139 - 191 cm
Device weight:	86 kg
Lift / Descent for:	max. 1 person
Fixed anchor points:	2
Maximum permissible load:	1000 kg



EN 795/B:2012
TS 16415/B:2013



Max. 2 persons or
capacity of up to 1000 kg



The head is made of powder coated aluminum and has three ball-bearing wheels for guiding the work rope on rescue or lifting devices.



Aluminium steps are mounted with cotters and provide easier access to the tripod head when extending the legs to their maximum height.



Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.



The tripod legs are made of strengthened aluminium profiles with 9-step adjustment, locked with cotters. Legs are equipped with a wheels (for guiding the work rope) and anchor point (bore) for mounting winches.




UTB holder
described on page 68.

The universal holder (UTB) can be attached to all tripods offered. The following winches are compatible with the UTB carrier:

RUP502/RUP 502-T
RUP503/RUP503 - T



RUP 503
WITH UTB



RUP 502
WITH UTB



HEAD – PLAN VIEW

DIMENSIONS

NORM:

EN 795/B:2012
TS 16415/B:2013



LIFTING
AND LOWERING:





Max. 3 persons
or 1000 kg


COMPATIBLE
WITH BELOW DEVICES
USING NEW UTB BRACKET :

RUP 502-U
RUP 503-U
RUP 504
RUP 505-U
RUP 506
CRW 200
CRW 300

The lightweight TM15 aluminium safety tripod is an anchor point according to EN795/B and TS16415/B and can be used as a fall protection equipment. The TM15 tripod provides protection for up to 3 people at a time. The TM15 tripod consists of a powder-coated aluminium head with 3 ball-bearing polyamide rollers. The tripod is also equipped with 3 anchorage points on the side walls of the tripod head. Each of these points can be used as an anchor point for equipment to protect against falls from height. One point is designed for a maximum of one user at a time.

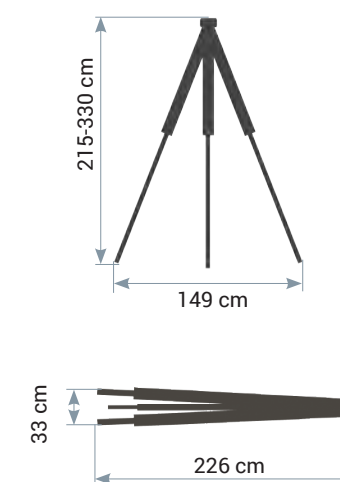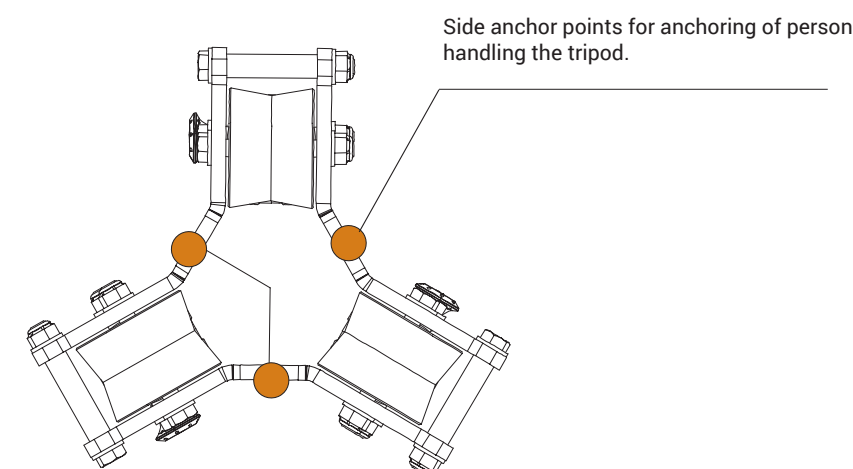

RUP 502-U

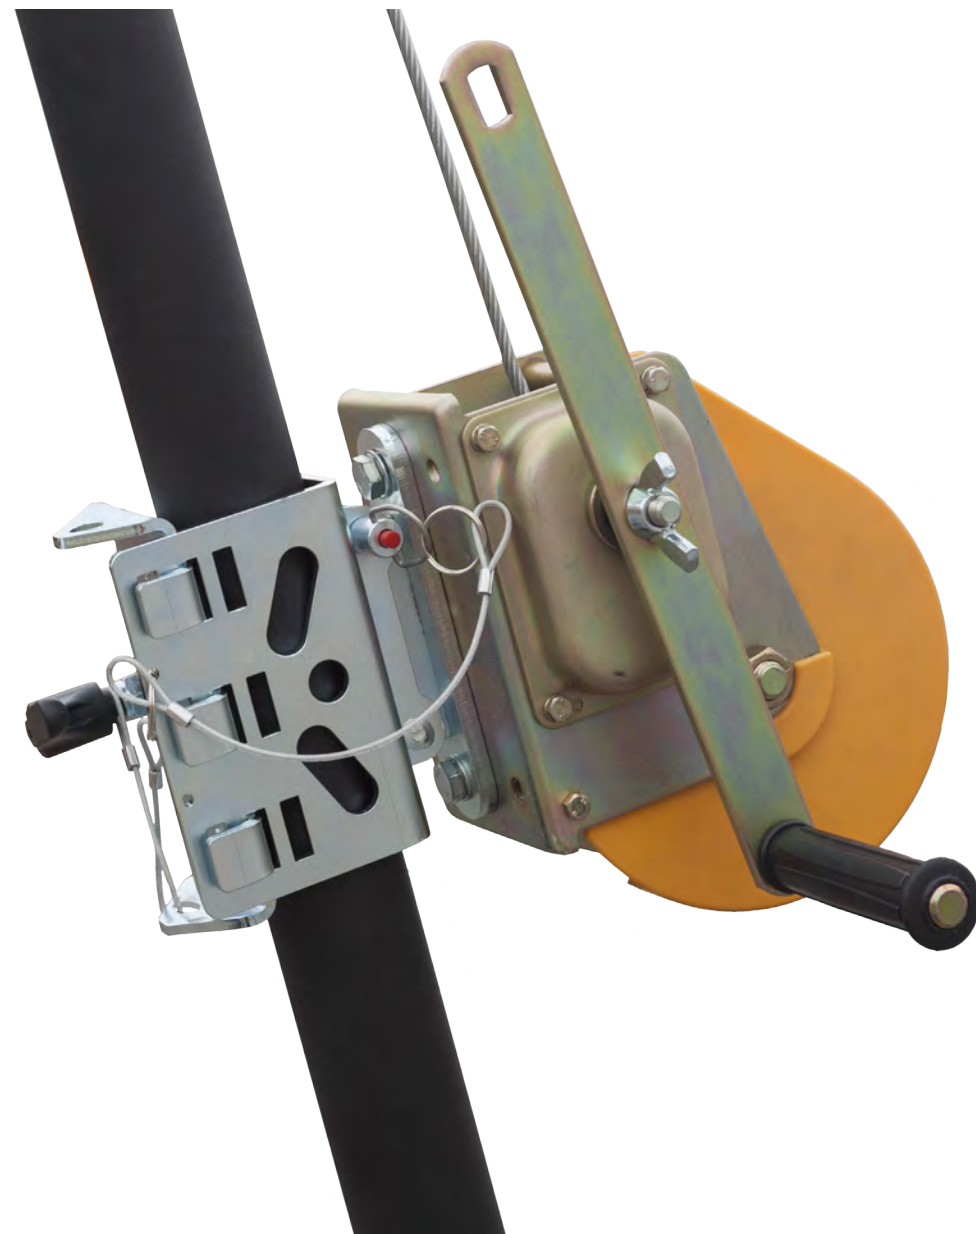

RUP 502-U is a winch equipped with a clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern of 20 and 25 m in length and 6.3 mm in diameter;

RUP 502 is a component of rescue equipment. The device, can be lifted from a lower level onto a higher level or vice-versa. The descent distance cannot be more than 2 m.



With the ratio used in the mechanism it is possible to make one turn of the drum per 5 turns of the winch's crank.

The crank arm is available in 2 lengths which, depending of the variant chosen, enable torque adjustment.

The RUP 502 rescue device complies with EN 1496/B.

Accessories:

Spring-type energy absorber SDW

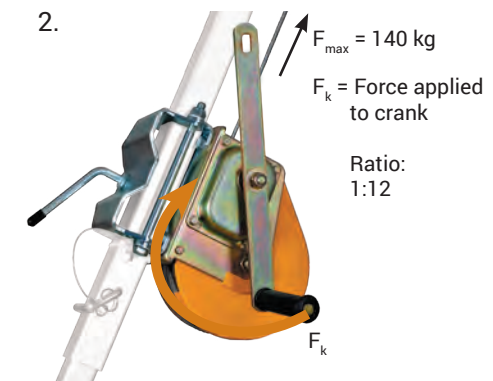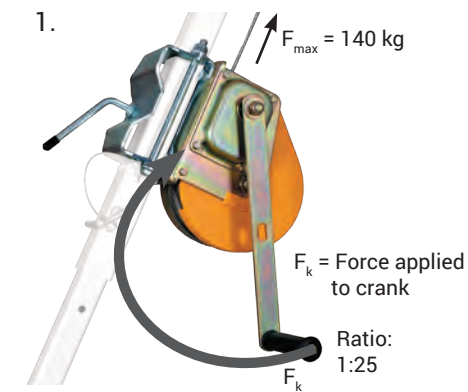


LOADS:

Variant 1:

At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 5.6 kG.

Variant 2:

At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 11.6 kG.

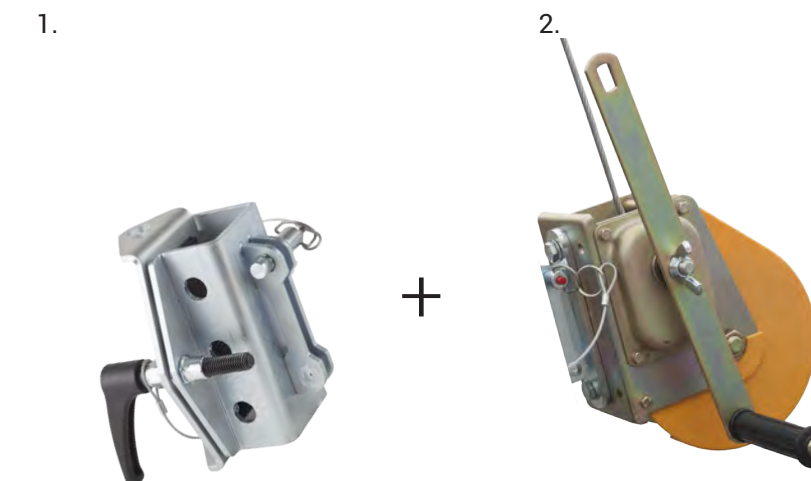

ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

1. Rup 502
2. UTB Clamp




KIT:

Rescue winch RUP 502 is offered with spring-type energy absorber SDW.

CABLE LENGTH VARIANTS:

20 m
25 m


CABLE PARAMETERS:




6x19+NFC

Ø 6,3 mm

OVERALL MECHANISM RATIO:



Variant 1
1 : 25



Variant 2
1 : 12

SPUR GEARING:



1 : 5

COMPATIBLE WITH :

Compatible with ALL personal tripod types

MAIN FEATURES:

Winch weight:	13 kg, 14 kg
Available cable variants:	20 m, 25 m
Cable diameter:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1 : 5
Force applied to lift 140 kg for variant 1:	5,6 kG
Force applied to lift 140 kg for variant 2:	11,6 kG
Permissible work load:	140 kg
Standard:	EN 1496/B
Compatible with ALL tripod types	




EN 1496/B



1 person
at max. 140 kg

RUP 502-B

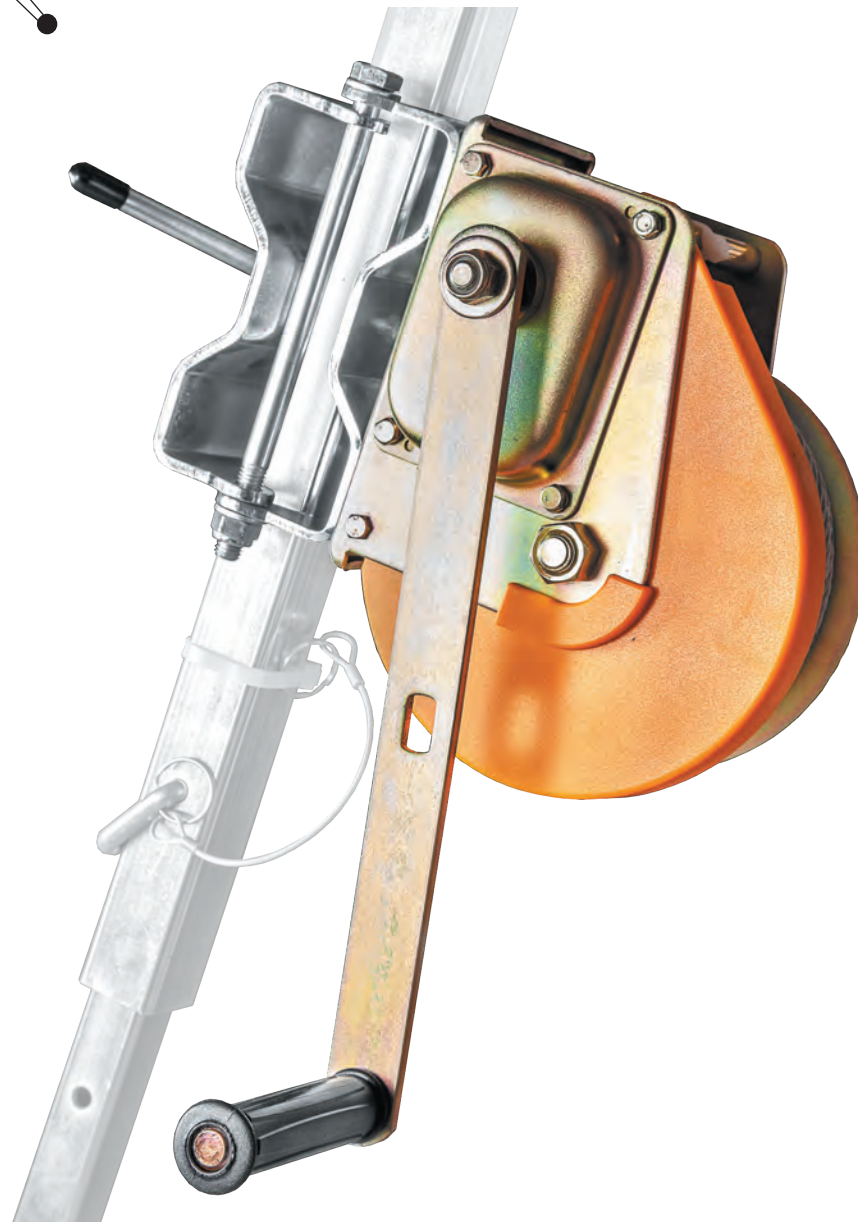

RUP 502-B is a winch equipped with a clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern of 20 and 25 m in length and 6.3 mm in diameter;

RUP 502-B is a component of rescue equipment. The device, can be lifted from a lower level onto a higher level or vice-versa. The descent distance cannot be more than 2 m.

With the ratio used in the mechanism it is possible to make one turn of the drum per 5 turns of the winch's crank.



The crank arm is available in 2 lengths which, depending of the variant chosen, enable torque adjustment.

The RUP 502-B rescue device complies with EN 1496/B.

Accessories:

Spring-type energy absorber SDW

Pulley PL 101

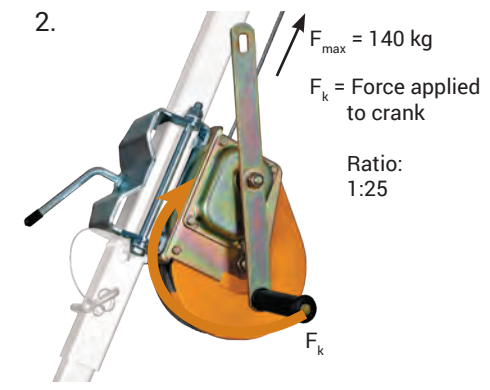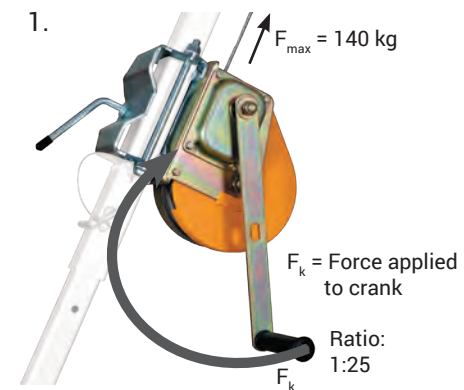



LOADS:

Variant 1:

At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 5.6 kG.

Variant 2:


At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 11.6 kG.

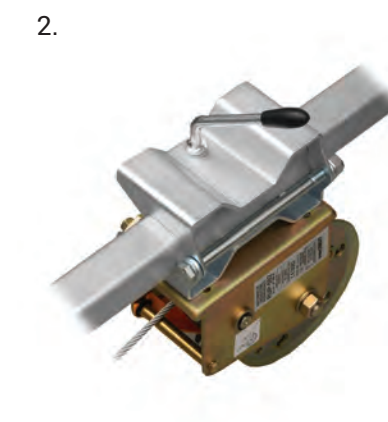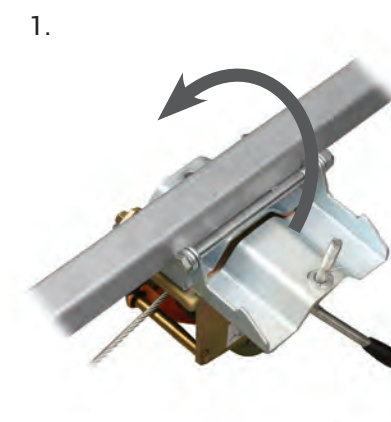

ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

1. Clamp opened;
2. Clamp closed.

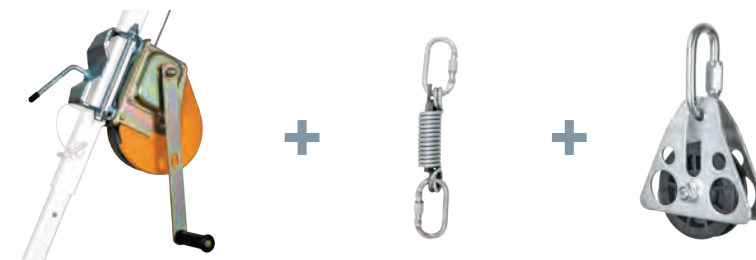


KIT:

Rescue winch RUP 502-B is offered with pulley PL 101 and spring-type energy absorber SDW.

CABLE LENGTH VARIANTS:

20 m
25 m

CABLE PARAMETERS:




6x19+NFC




ø 6,3 mm

OVERALL MECHANISM RATIO:



Variant 1
1 : 25



Variant 2
1 : 12

SPUR GEARING:



1 : 5

COMPATIBLE WITH :

TM 7

MAIN FEATURES:

Winch weight:	13 kg, 14 kg
Available cable variants:	20 m, 25 m
Cable diameter:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1 : 5
Force applied to lift 140 kg for variant 1:	5,6 kG
Force applied to lift 140 kg for variant 2:	11,6 kG
Permissible work load:	140 kg
Compatible with tripod types:	TM7
Standard:	EN 1496/B



EN 1496/B



1 person
at max. 140 kg

RUP 503-U



RUP 503-U is a winch equipped with clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern, available in options of 25 m, 35 m, 45 m, 50 m in length and 6.3 mm in diameter;

RUP 503-U is a component of rescue equipment. Using the device, a casualty can be lifted from a lower level onto a higher level or vice-versa. The descent distance cannot be more than 2 m;

With the ratio used in the mechanism it is possible to make one turn of the drum per 7.2 turns of the winch's crank;


Crank arm can be disassembled for easier transport;

The RUP 503 rescue device complies with EN 1496/B.

Accessories:
Spring-type energy absorber SDW




Switch for winch mechanism clutch disengagement and switching of descent/lift modes.

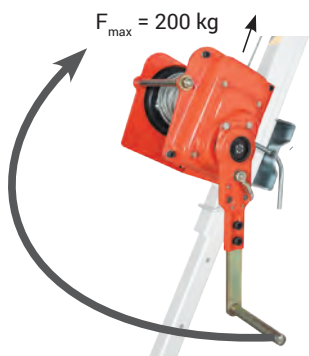

F_k = Force applied to crank
Ratio: 1:27

1:

2:

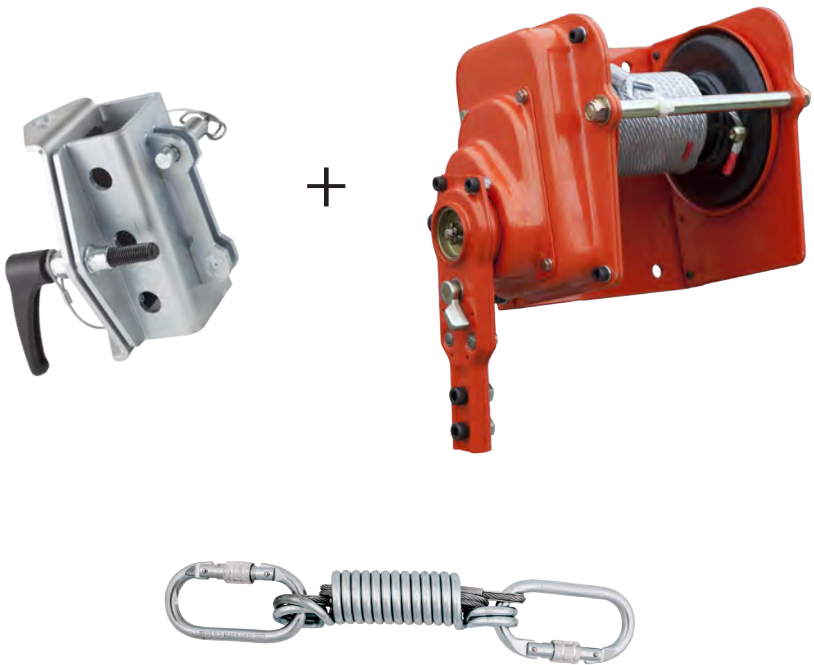

LOADS:

At load weight (F_{max}) of 200 kg force applied to the crank (F_k) shall be 7.41 kG.





ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

1. Rup 502
2. UTB Clamp

KIT:

Rescue winch RUP 502 is offered with spring-type energy absorber SDW.

CABLE LENGTH VARIANTS:	CABLE PARAMETERS:	OVERALL MECHANISM RATIO:	SPUR GEARING:	COMPATIBLE WITH :
<div>— 25 m</div> <div>— 35 m</div> <div>— 45 m</div> <div>— 50 m</div>	 <div>6x19+NFC</div> <div>  <div>ø 6,3 mm</div> </div>	 <div>Variant 1</div> <div>1 : 27</div>	 <div>1 : 7,2</div>	<div>TM 6</div> <div>TM 12</div> <div>TM 12-2</div> <div>TM 15</div>

MAIN FEATURES:	
Winch weight depending on cable length:	22,5 kg to 26,2 kg
Cable length:	25 m, 35 m, 45 m or 50 m
Cable diameter:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1 : 7,2
Force required for pulling load with weight of 200 kg:	7,41 kG
Permissible work load:	200 kg
Compatible with tripod types:	TM6, TM12, TM12-2, TM15
Standard:	EN 1496/B



EN 1496/B



2 persons
at max. 200 kg



RUP 503-B



Switch for winch mechanism clutch disengagement and switching of descent/lift modes.

RUP 503-B is a winch equipped with clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern, available in options of 25 m, 35 m, 45 m, 50 m in length and 6.3 mm in diameter;

RUP 503-B is a component of rescue equipment. Using the device, a casualty can be lifted from a lower level onto a higher level or vice-versa. The descent distance cannot be more than 2 m;

With the ratio used in the mechanism it is possible to make one turn of the drum per 7.2 turns of the winch's crank;


Crank arm can be disassembled for easier transport;

The RUP 503-B rescue device complies with EN 1496/B.

Accessories:

Spring-type energy absorber SDW

Pulley PL 101

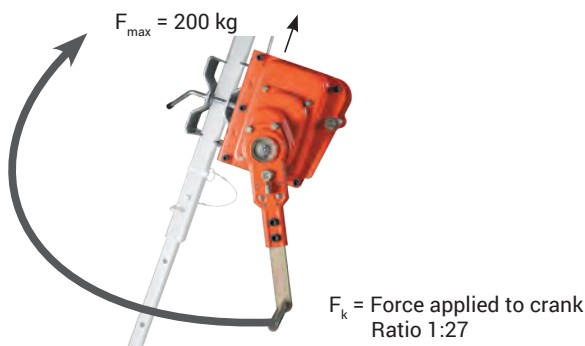

LOADS:

At load weight (F_{max}) of 200 kg force applied to the crank (F_k) shall be 7.41 kG.

ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

1. Clamp opened;
2. Clamp closed.



KIT:

Rescue winch RUP 503-B is offered with pulley PL 101 and spring-type energy absorber SDW.

CABLE LENGTH VARIANTS:	CABLE PARAMETERS:	OVERALL MECHANISM RATIO:	SPUR GEARING:	COMPATIBLE WITH :
25 m	 6x19+NFC ø 6,3 mm	1 : 27	 1 : 7,2	TM 7
35 m				
45 m				
50 m				

MAIN FEATURES:	
Winch weight depending on cable length:	22,5 kg to 26,2 kg
Cable length:	25 m, 35 m, 45 m or 50 m
Cable diameter:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1 : 7,2
Force required for pulling load with weight of 200 kg:	7,41 kG
Permissible work load:	200 kg
Compatible with tripod types:	TM7
Standard:	EN 1496/B



EN 1496/B



2 persons
at max. 200 kg

RUP 505-U



RUP 505-U is a rescue lifting device equipped with clamp for mounting of the device on a tripod leg. The lifting device operates with static textile ropes of length as required by the customer. The rope should be ordered separately.

RUP 505-U is a component of rescue equipment. Using the device, a casualty can be lifted from a lower level onto a higher level or vice-versa. The descent distance cannot be more than 2 m;


With the ratio used in the mechanism it is possible to make one turn of the drum per 2.13 turns of the device's crank or in the second mode, 6.2 turns;

The crank is easily dismounted to facilitate transport;

The RUP 505 rescue device complies with EN 1496/B.

Accessories:

Spring-type energy absorber SDW

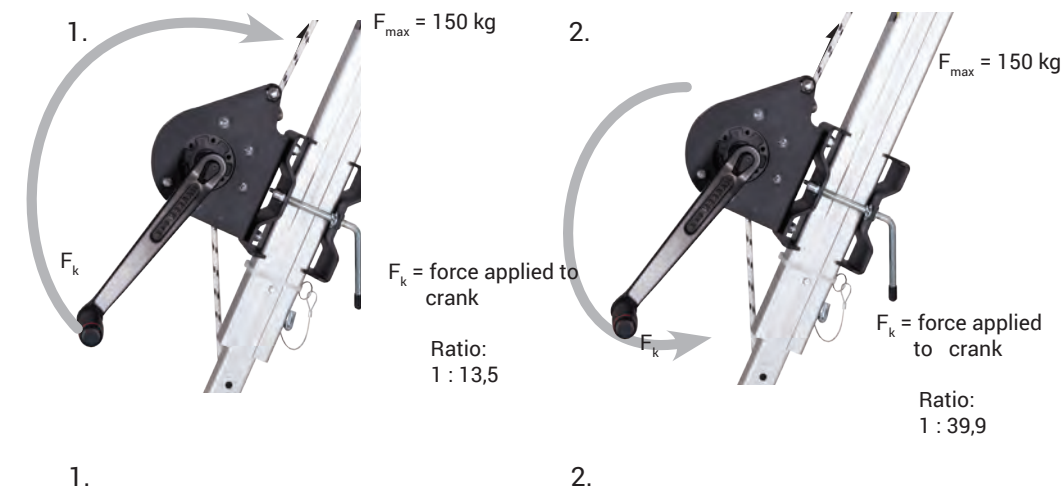


LOADS:

Variant 1:

At load weight (F_{\max}) of 150 kg force applied to the crank (F_k) shall be 11,11 kG

Variant 2:

At load weight (F_{\max}) of 150 kg force applied to the crank (F_k) shall be 3,75 kG

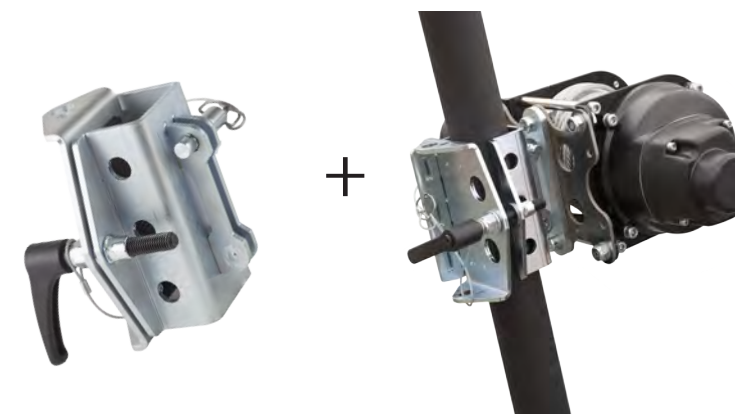

INSTALLATION:

Simple mounting of the device on the tripod leg by means of a clamp:


1. Utb Clamp
2. RUP 505-U

CABLE LENGTH VARIANTS:	CABLE PARAMETERS:	OVERALL MECHANISM RATIO:	SPUR GEARING:	COMPATIBLE WITH :
unlimited Rope sold separately	\varnothing 10-11 mm	Variant 1 1 : 13,5	1 : 2,13	TM 9 - N TM 15
		Variant 2 1 : 39,9	1 : 6,28	

MAIN FEATURES:

Lifting device weight:	8 kg
Rope length:	unlimited
Rope type:	od 10 do 11 mm
Rope diameter:	static textile rope conforms with EN 1891
Mechanism ratio 1:	1 : 2,13
Mechanism ratio 2:	1 : 6,28
Force applied to lift 150 kg kg for variant 1:	11,11 kG
Force applied to lift 150 kg kg for variant 2:	3,75 kG
Permissible work load:	150 kg
Compatible with tripod type:	TM 9-N, TM 15
Standard:	EN 1496/B

EN 1496/B



Personal lifting device for up to 150 kg

RUP 506

RUP 506 cable battery powered winch

Electric battery winch equipped with a wire rope of 5mm in diameter and of the lenght of 15m, rolled on a drum. The device is used to lift goods. Admissible working load while lifting goods (WLL): 140kg. If an additional TU415/TU416 block is used, the working load when lifting goods (WLL) can be increased to 250kg. The device can be used to lift and descend people and to evacuate them when an additional self-holding device of the WR / CR / CRW series is used. Admissible working load when lifting/descending people (WLL): 140kg. Battery backup. The kit includes two 18V 4.0Ah batteries together with a charger. The battery life at full load equals ~ 20...25 minutes. Operating speed: 4m/min (when using TU415/TU416 block - 2m/min). The device is equipped with a tie plate (RUP506-000-001) as well as with a UTB connector (AT017-330).




PARAMETERS

Weight:	10 kg
WLL:	140 kg - for cargo
Diameter of the rope:	5 mm
Length of rope:	15 m
Type of rope:	steel
Dimensions:	288 x 122 x 144
Compatible with:	TM 1, TM 6, TM 9-N, TM12, TM12-2, TM 14, TM 15

RUP 506 + UTB CONNECTOR

UTB

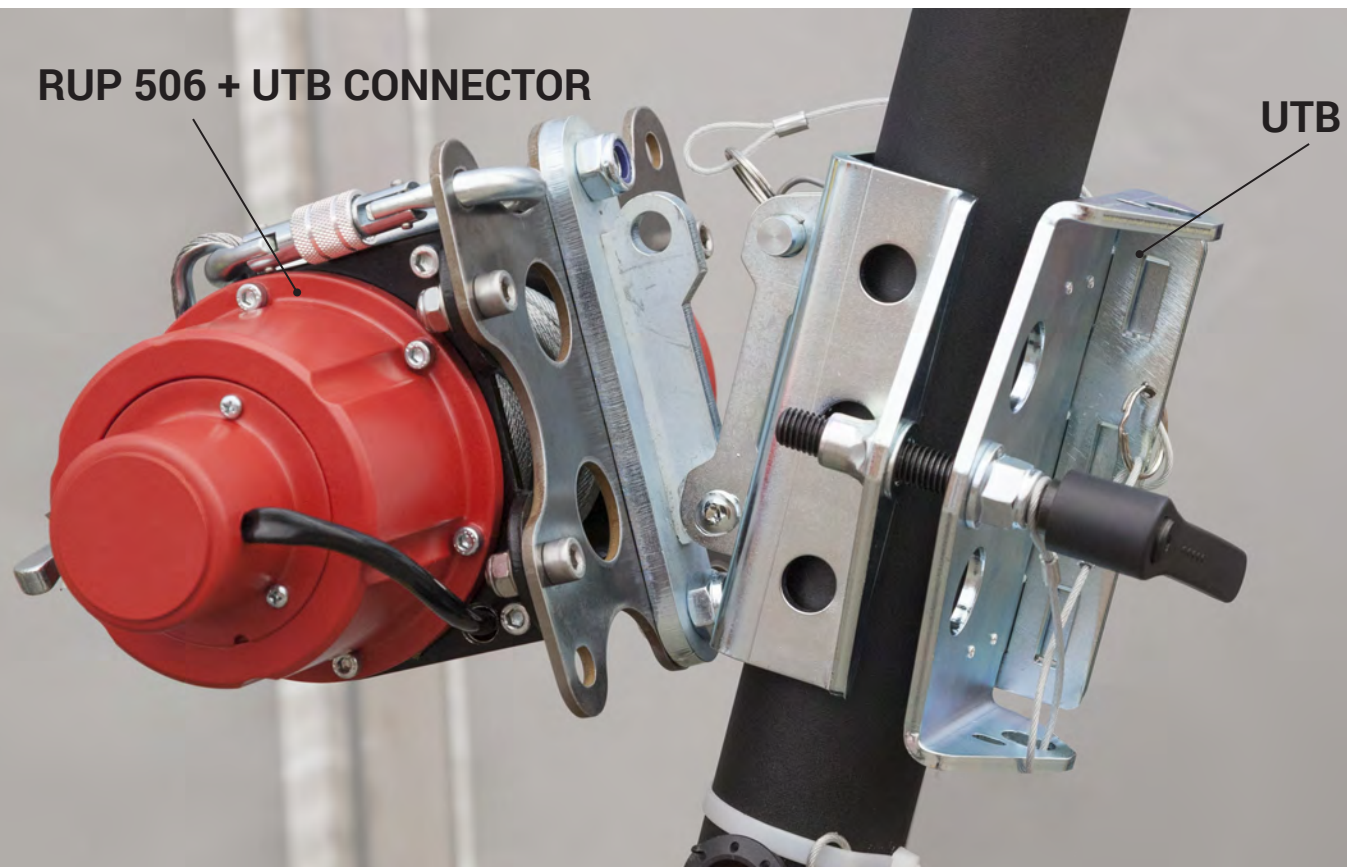

RUP 504

RUP 504 cable single-phase 230V electric winch

A 230V AC 1-phase electric winch equipped with a wire rope of the diameter of 6mm and the length of 30m rolled on a drum. The device is used to lift goods. Admissible working load while lifting goods (WLL): 500kg. If an additional TU415 / TU416 block is used, the working load when lifting goods (WLL) can be increased to 1000kg. The device can be used to lift and descend people and to evacuate them when an additional self-holding device of the WR / CR / CRW series is used. Admissible working load when lifting / descending people (WLL): 200kg. A 230V 1-phase alternating power supply. The kit includes a cable for connection to the mains with an EU plug. Operating speed: 7m/min (when using TU415/TU416 block - 3.5m/min). The device is equipped with a tie plate (RUP506-000-001) as well as with a UTB connector (AT017-330).



PARAMETERS

Weight:	21 kg
WLL:	500 kg - for cargo
Diameter of the rope:	6 mm
Length of rope:	30 m
Type of rope:	steel
Dimensions:	490 X 170 X 180
Compatible with:	TM 6, TM 9-N, TM12, TM12-2, TM 14, TM 15

RUP 504 + UTB CONNECTOR

UTB



CRW 200



CRW 200 is a combination of a retractable type fall arrester and a rescue lifting device. The device is equipped with a manual winch featuring lift and descent functions. In order to install on the tripod, first mount an adequate mounting clamp;

Connector has a fall indicator; the design requires no energy absorber;

Permissible work load: 140 kg;

With the ratio used in the mechanism it is possible to make one turn of the drum per 7.4 turns of the winch's crank;

Retractable type fall arrester CRW 200 is a component of personal fall protection equipment and conforms to EN 360 and EN 1496/B.


Hook with fall indicator



Clamp for mounting retractable type fall arrester CRW 200 on the tripod leg. According to the leg thickness, either clamp UTB + CRW 200-UB. The clamp is simple to mount and is made of galvanized steel. Above is an example mounting of clamp tripod leg.



Example mounting of fall arrester CRW 200 by means of clamp CRW 200-UB on tripod leg.

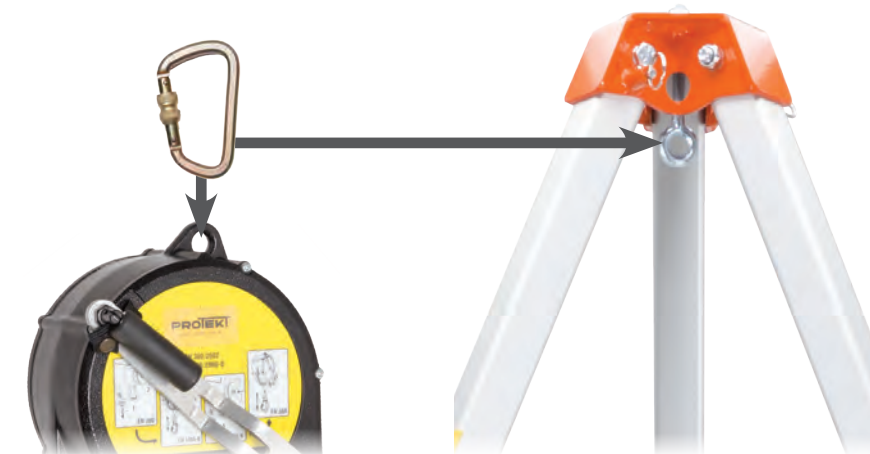

Side anchor point on tripod head can be used to attach fall arrester CRW 200 by means of connector AZ 017.



Example mounting of fall arrester CRW 200 by means of side anchor point on tripod head.

CABLE LENGTH VARIANTS:	CABLE PARAMETERS:	OVERALL MECHANISM RATIO:	SPUR GEARING:	COMPATIBLE WITH :
15 m	7x19 + IWRC Ø 4,7 mm	Variant 1 1 : 22	1 : 8,8	Compatible with ALL personal tripod types

MAIN FEATURES:

Winch weight:	11 kg
Cable length:	15 m
Cable diameter:	4,8 mm
Cable type:	7x19 + IWRC
Mechanism ratio:	1 : 8,8
Force required for pulling load with weight of 140 kg:	6.4 kG
Permissible work load:	140 kg
Standard:	EN 1496/B
Compatible with ALL personal tripod types	



CRW 300

CRW 300 is a combination of a retractable type fall arrester and a rescue lifting device. The device is equipped with a manual winch featuring lift and descent functions. In order to install on the tripod, first mount an adequate mounting clamp;

Connector has a fall indicator; the design requires no energy absorber;

Permissible work load: 140 kg;

With the ratio used in the mechanism it is possible to make one turn of the drum per 7.4 turns of the winch's crank;

Retractable type fall arrester CRW 300 is a component of personal fall protection equipment and conforms to EN 360 and EN 1496/B.



Clamp for mounting retractable type fall arrester CRW 300 on the tripod leg. According to the leg thickness, either clamp CRW 300-UB is used. The clamp is simple to mount and is made of galvanized steel.

Example mounting of fall arrester CRW 300 by means of clamp CRW 300-UB on tripod leg.








Hook with fall indicator



Side anchor point on tripod head can be used to attach fall arrester CRW 300 by means of connector AZ 017.



Example mounting of fall arrester CRW 300 by means of side anchor point on tripod TM 6 head.

CABLE LENGTH VARIANTS:	CABLE PARAMETERS:	OVERALL MECHANISM RATIO:	SPUR GEARING:	COMPATIBLE WITH :
<div>  25 m </div>	<div>  7x19 + IWRC <div>  ø 4,7 mm </div> </div>	<div>  Variant 1 1 : 22 </div>	<div>  1 : 7,4 </div>	<div> Compatible with ALL personal tripod types </div>

MAIN FEATURES:

Winch weight:	15 kg
Cable length:	25 m
Cable diameter:	4,8 mm
Cable type:	7x19 + IWRC
Mechanism ratio:	1 : 7,4
Force required for pulling load with weight of 140 kg:	6.3 kG
Permissible work load:	140 kg
Standard:	EN 1496/B
Compatible with ALL personal tripod types	



RUP 502-BT




RUP 502-BT is a winch equipped with clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern of 25 m in length and 6.3 mm in diameter;

Intended for lifting loads with weight of up to 500 kg;


With the ratio used in the mechanism it is possible to make one turn of the drum per 5 turns of the winch's crank;

The crank arm is available in 2 lengths which, depending of the variant chosen, enable torque adjustment.

Accessories:
Pulley PL 101

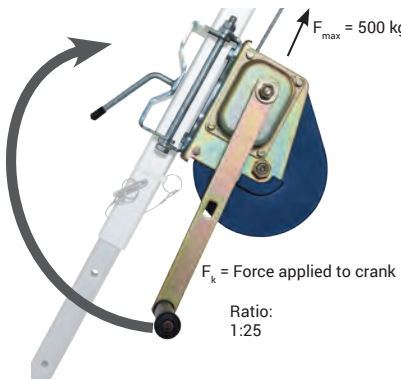

1.

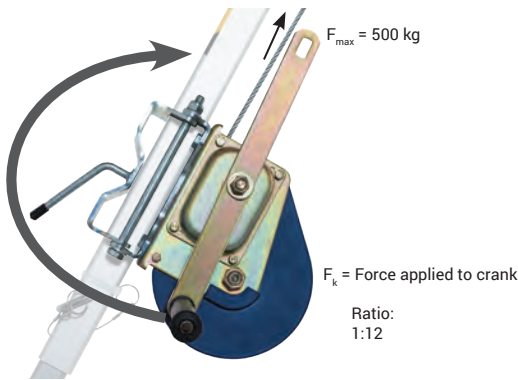



2.

LOADS:

Variant 1:
At load weight (Fmax) of 500 kg force applied to the crank (Fk) shall be 20 kG.
Variant 2:
At load weight (Fmax) of 500 kg force applied to the crank (Fk) shall be 41.6 kG.


ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:
1. Clamp opened;
2. Clamp closed.

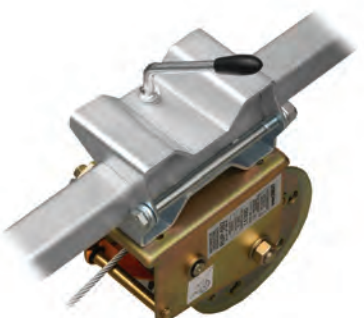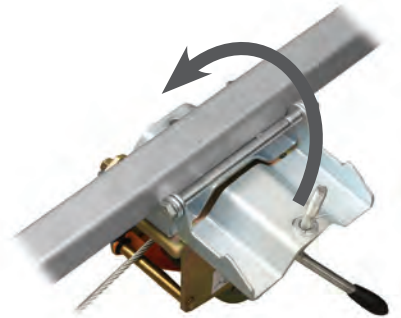


KIT:

Rescue winch RUP 502-BT is offered with pulley PL 101.

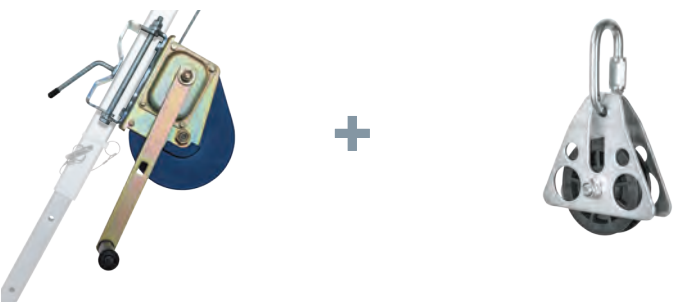


CABLE LENGTH VARIANTS:	CABLE PARAMETERS:	OVERALL MECHANISM RATIO:	SPUR GEARING:	COMPATIBLE WITH :
20 m 25 m	 6x19+NFC ø 6,3 mm	 Variant 1 1 : 25 Variant 2 1 : 12	 1 : 5	TM 7-T

MAIN FEATURES:	
Winch weight:	13 kg, 14 kg
Available cable variants:	20 m, 25 m
Cable diameter:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1 : 5
Force applied to lift 140 kg for variant 1:	20 kG
Force applied to lift 140 kg for variant 2:	41,6 kG
Permissible work load:	500 kg
Compatible with tripod types:	TM7-T



RUP 503-BT

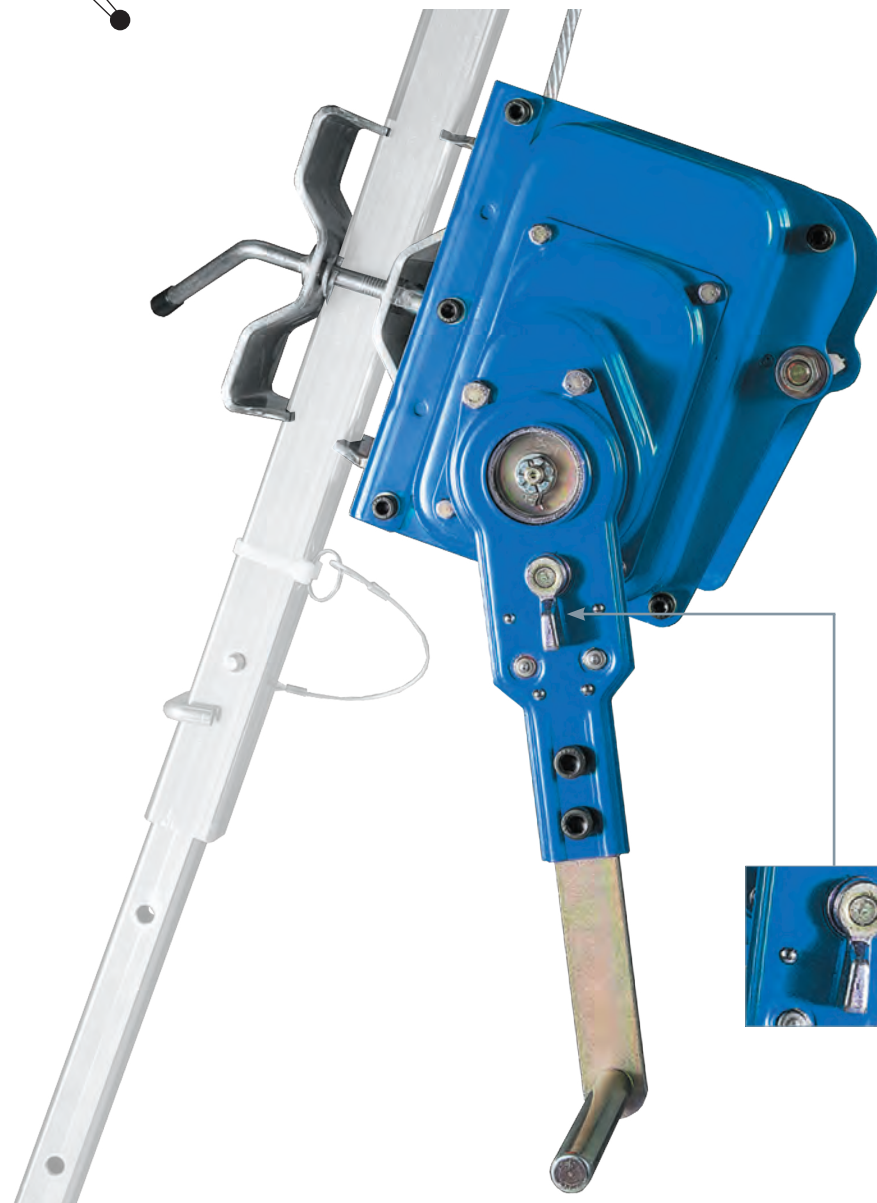

RUP 503-BT is a winch equipped with clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern, available in options of 25 m, 35 m, 45 m, 50 m in length and 6.3 mm in diameter;

Intended for lifting loads with weight of up to 1000 kg;


With the ratio used in the mechanism it is possible to make one turn of the drum per 22.2 turns of the winch's crank;

Crank arm can be disassembled for easier transport.

Accessories:
Pulley PL 101



Switch for winch mechanism clutch disengagement and switching of descent/lift modes.

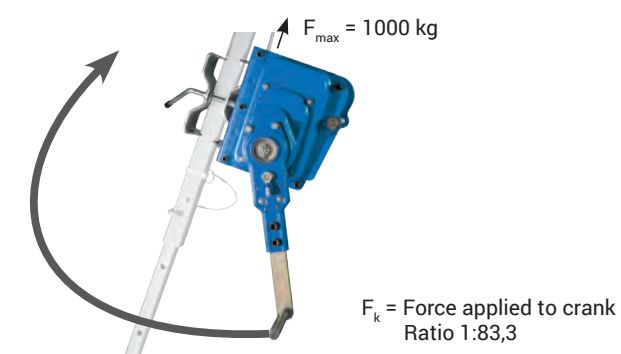

LOADS:

At load weight (F_{\max}) of 1000 kg force applied to the crank (F_k) shall be 12 kG.

ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

1. Clamp opened;
2. Clamp closed.

1.







2.



KIT:

Rescue winch RUP 503-BT is offered with pulley PL 101.

CABLE LENGTH VARIANTS:	CABLE PARAMETERS:	OVERALL MECHANISM RATIO:	SPUR GEARING:	COMPATIBLE WITH :
25 m	 6x19+NFC  ø 6,3 mm	 1 : 83,3	 1 : 22,2	TM 7-T
35 m				
45 m				
50 m				

MAIN FEATURES:

Winch weight:	22,5 kg to 26,2 kg
Cable diameter:	25 m, 35 m, 45 m or 50 m
Cable type:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1 : 22,2
Force required for pulling load with weight of 1000 kg:	12 kG
Permissible work load:	1000 kg
Compatible with tripod types:	TM7-T




Capacity of up to 1000 kg




PULLEYS

PL 101, TU 415, TU 416

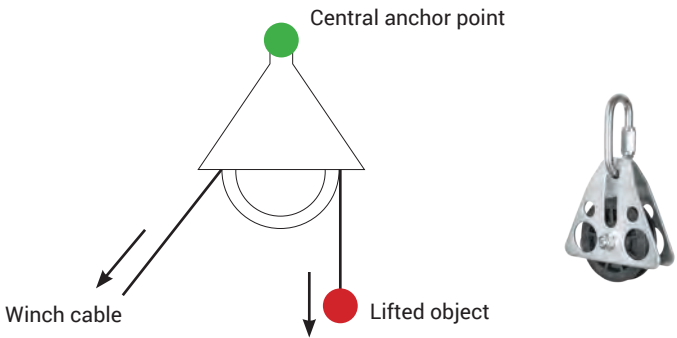


PL 101

Basic pulley of 90 mm in diameter attached at anchor point on the tripod head. Made of galvanized steel and polyamide. Connected to anchor point by means of connector AZ 090.

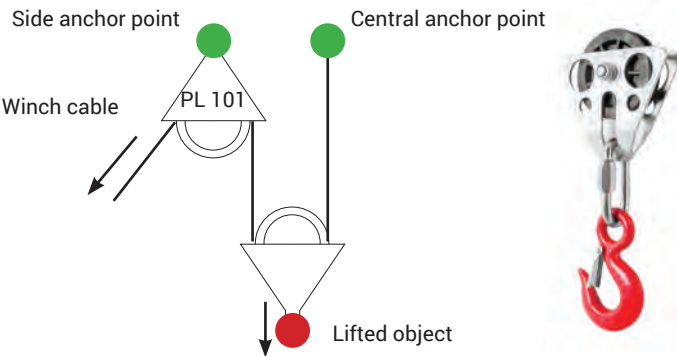

TU 415

Pulley TU 415 with steel hook is used for lifting and lowering loads with weight of up to 1000 kg. It can be used both with steel cables (of up to 6.3 mm in diameter) and textile ropes (of diameters between 8 and 12 mm). The mechanism ratio 2:1 enables reduction of the force required to lift a given load, thus allowing for lifting of as much as twice the load using a given winch. The product can be used with all winches and tripods. When used with tripods and winches with admissible load of 500 kg (TM 9 series) it is possible to increase the load capacity of the whole combination up to 1000 kg.

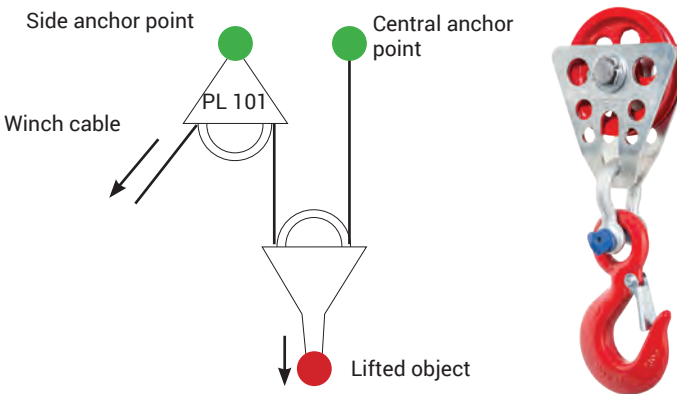

TU 416

Pulley TU 416 with steel hook is used for lifting and lowering loads with weight of up to 2000 kg. It can be used both with steel cables (between 6.3 and 8.0 mm in diameter) and textile ropes (of diameters between 10,5 and 14 mm). The mechanism ratio 2:1 enables reduction of the force required to lift a given load, thus allowing for lifting of as much as twice the load using a given winch. The product can be used with all winches and tripods. When used with tripods and winches with admissible load of 1000 kg (TM 6-T, TM 12, TM 12-2, TM 15) it is possible to increase the load capacity of the whole combination up to 2000 kg.

MAIN FEATURES:

	PL 101	TU 415	TU 416
Material:	Polyamide, galvanized steel	Polyamide, galvanized steel	Cast iron, galvanized steel
Weight:	0,45 kg	1,14 kg	2,54 kg
Pulley wheel diameter:	90 mm	90 mm	110 mm
Dimensions:	133x56x128 mm	300x130x56 mm	330x130x56 mm
Static strength:	15 kN	10 kN	20 kN
Breaking strength:	30 kN	50 kN	60 kN
Admissible weight load:	1000 kg	1000 kg	2000 kg

CABLE DIAMETER:

- max. 6.3 mm for steel cable
- between 8 and 12 mm for textile rope

WORK LOAD:

Permissible work load: 10 kN

CABLE DIAMETER:

- max. 6.3 mm for steel cable
- between 8 and 12 mm for textile rope

WORK LOAD:

Permissible work load: 10 kN

CABLE DIAMETER:

- between 6.3 mm and 8 mm for steel cable
- between 10,5 and 14 mm for textile rope

WORK LOAD:

Permissible work load: 20 kN